
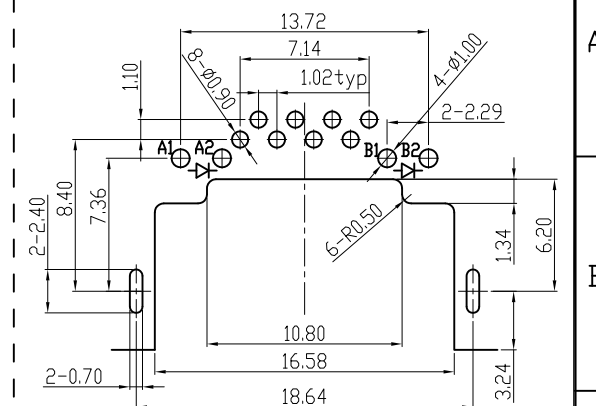
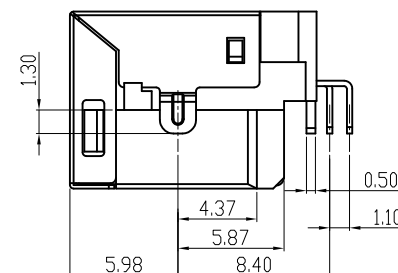
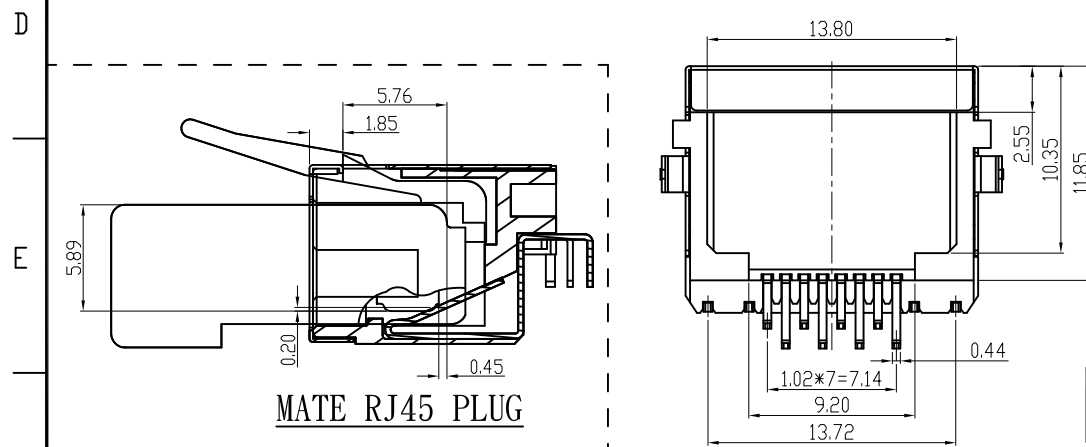
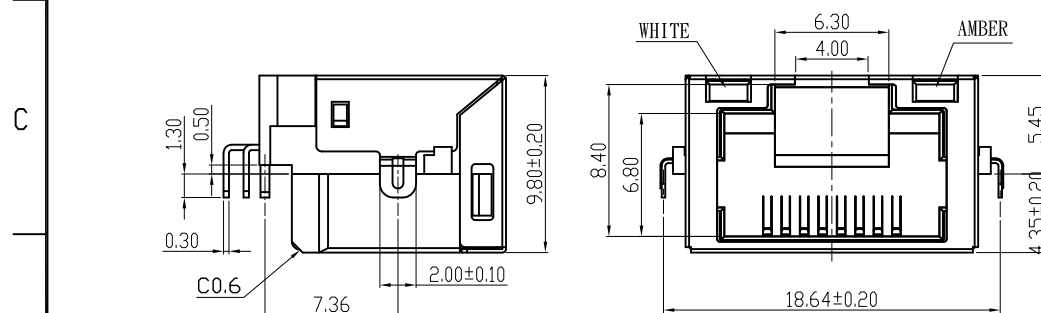


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
Aa	新訂圖面	—	07/16/2013	胡久量

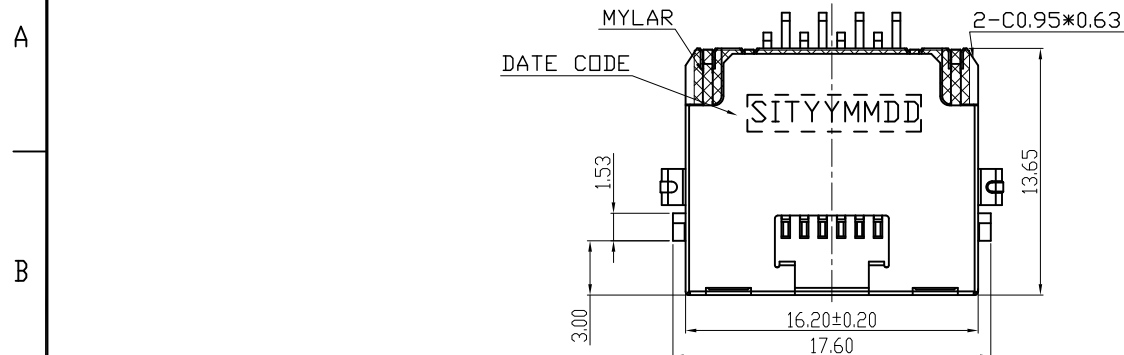

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.20±0.05

NOTES:

- 1.MATERIAL:
1-1:HOUSING:PA9T(HF);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R);T=0.30mm TREATMENT:1u"G/50u"MATTE TIN OR 30u"G/50u"MATTE TIN
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:WHITE/AMBER,TREATMENT:SILVER
1-5:MYLAR:THERMOPLASTIC;COLOR:YELLOW
- 2.ELECTRICAL CHARACTERISTICS:
2-1.CURRENT RATING:1.5A MAX.
2-2.VOLTAGE RATING:150V MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN AT 500V DC AFTER 1 MINUTE.
2-4.DIELECTRIC WITHSTANDING VOLTAGE: 1000V AC CONTACT TO CONTACT.
- 3.MECHANICAL CHARACTERISTICS:
3-1.MATING FORCE:2.3kgf MAX.
3-2.UNMATING FORCES:5.0kgf MIN
3-3.OPERATING TEMPERATURE:-30°TO +70°

Part Number(客戶)	AU
2RJ1684-000111F	G/F
2RJ1684-000211F	30u"

LED ELECTRICAL CHARACTERISTIC

NODE	COLOR	
A1(+) A2(-)	WHITE	A1- $\rightarrow$ A2
B1(+) B2(-)	AMBER	B1- $\rightarrow$ B2

TABLE:

30μ	CD4531022008	-02	WHITE NI	YES
G/F	CD4531022008	-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 胡久量
CHECKED BY
APPROVED BY
ITEM
PART NO

MINI RJ45 PHONE JACK
(板上5.45mm)453專用

CD4531022008-XX

ANGLE PROJECTION
UNIT mm
SCALE 1:1
DATE 07/16/2013
TOLERANCE .X±0.20 .XX±0.10