

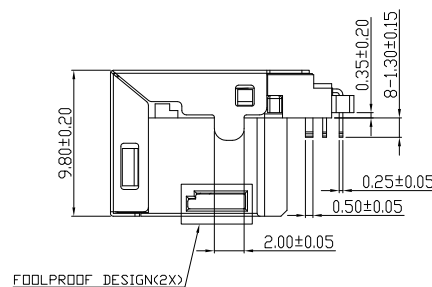
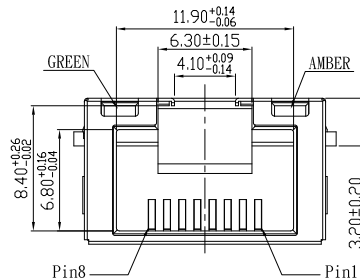
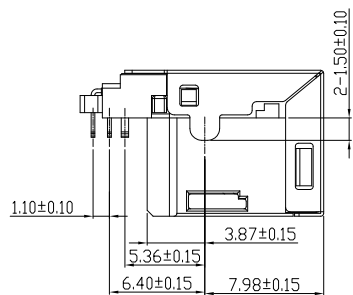



RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	05/06/2016	彭志婷

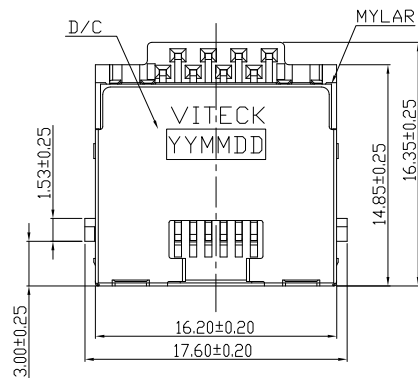

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.20±0.05

NOTES:

1.MATERIAL:

1-1:HOUSING:PA10T+35%GF<VICNYL R635NH>/PA4T;UL 94V-0, COLOR:BLACK

1-2:TERMINAL:PHOSPHOR BRONZE<C5210R-EH>;T=0.25mm TREATMENT:

1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.

2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.

1-3:SHELL:SUS<201>;T=0.20mm,TREATMENT:50u" NI

1-4:LED:GREEN/AMBER,TREATMENT:TIN

1-5:STOPPLE:LCP<E6808>;UL 94V-0,COLOR:BLACK

1-6:DEFEND :LCP<E6808>;UL 94V-0,COLOR:BLACK

1-6:MYLAR:YELLOW

2.SPECIFICATIONS:

2-1.VOLTAGE RATING:150VAC MAX.

2-2.CURRENT RATING:1.5AMP MAX.

2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.

2-4.DIELECTRIC WITHSTANDING VOLTAGE:

500V AC 60HZ 1MINUTE.

2-5.DURABILITY:5000 CYCLES.

2-6.OPERATING TEMPERATURE:-30°C TO+70°C.

2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(凡準)	AU
RJN-023-1L12H6	G/F
RJN-023-1L12H8	30u"

TABLE:

30μ"	CD4521052001	-02	WHITE NI	YES
G/F	CD4521052001	-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

LED ELECTRICAL CHARACTERISTIC

NODE	COLOR	WAVELENGTH	FORWARD CURRENT
A1(+)	GREEN	564-577nm	If=20mA
B1(+)	AMBER	584-594nm	If=20mA

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 彭志婷

CHECKED BY

APPROVED BY


ITEM

MINI RJ45 PHONE JACK(板上3.2mm)大防呆

PART NO

CD4521052001-XX

ANGLE PROJECTION



UNIT

mm

SCALE

1:1

TOLERANCE

.X±0.20
.XX±0.10

DATE

05/06/2016