

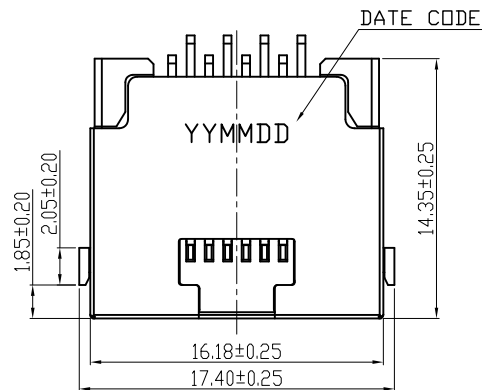



RoHS
Compliant

Halogen Free





REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△	新訂圖面	—	01/11/2017	張美華



VIEW A SCALE 5:1

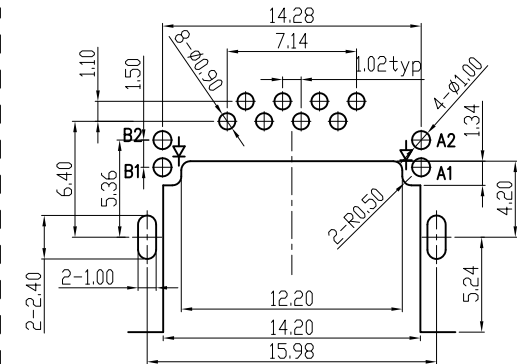

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm

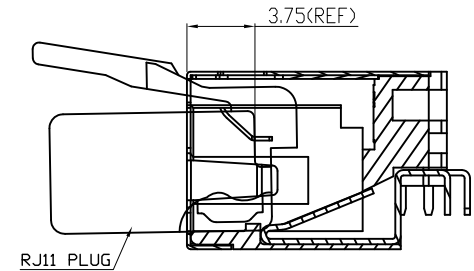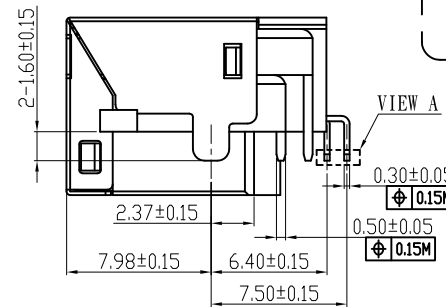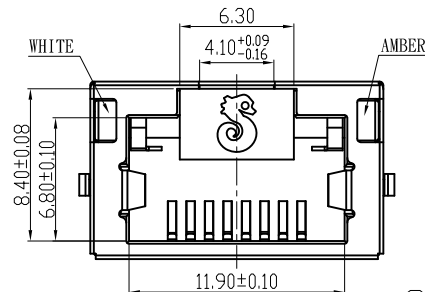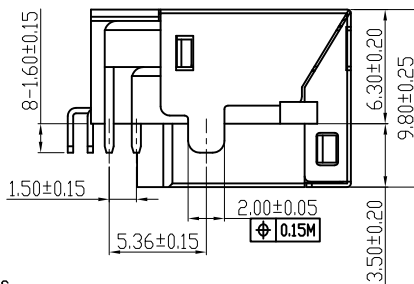

RJ11 PLUG MATED VIEW

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,
MATTE SN 50u" MIN ON SOLDER TAIL,ALL
OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:WHITE/AMBER,TREATMENT:TIN
1-5:SHRAPNEL:SUS(301);T=0.20mm
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:100MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO +70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.


TABLE:

30μ"	CD4531062006	-02
G/F	CD4531062006	-01
AU PLATING	PART NUMBER-XX	

Part Number(客戶)	AU
2RJ1650-030111F	G/F
2RJ1650-030211F	30U"

LED ELECTRICAL CHARACTERISTIC

NODE	COLOR	
A1(-) A2(+)	AMBER	A1-K-A2
B1(-) B2(+)	WHITE	B1-K-B2

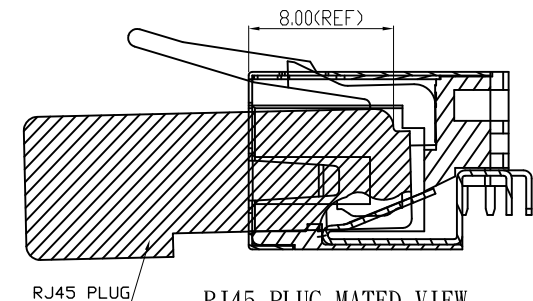

RJ45 PLUG MATED VIEW

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 張美華
CHECKED BY
APPROVED BY


ITEM

MINI RJ45 PHONE JACK(板上6.30mm 二)

PART NO

CD4531062006-XX

ANGLE PROJECTION



UNIT

mm

SCALE

1:1

TOLERANCE

.X±0.20
.XX±0.10

DATE