


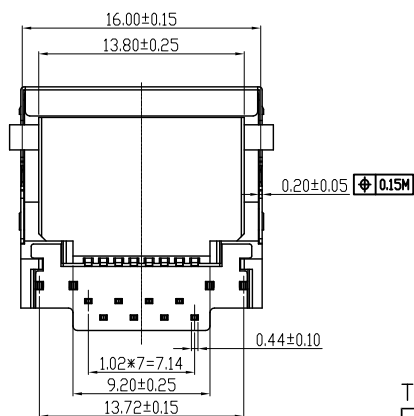
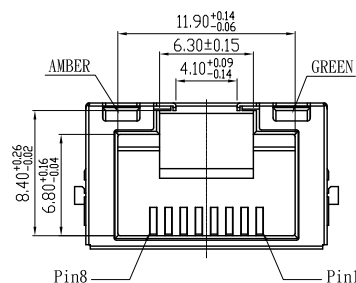
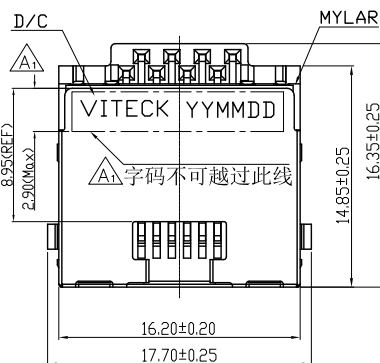
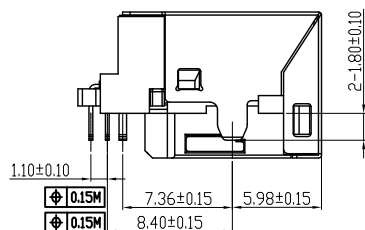



Halogen Free

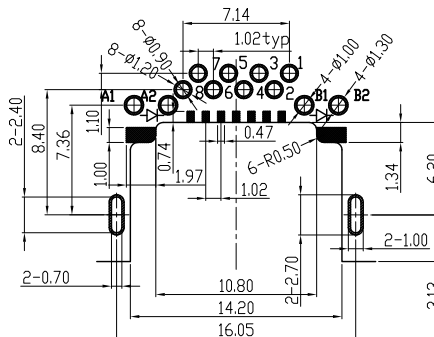

VIEW A SCALE 5:1

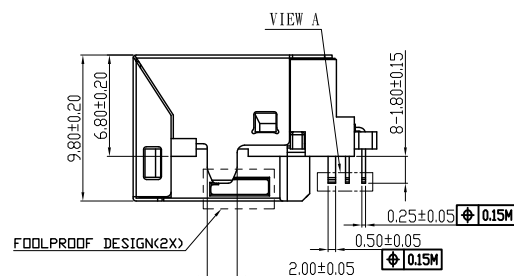

RECOMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMENDED PCB THICKNESS:1.20±0.05

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);JUL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:GREEN/AMBER,TREATMENT:TIN
1-5:STOPPLE:LCP(E6808);JUL 94V-0,COLOR:BLACK
1-6:DEFEND :LCP(E6808);JUL 94V-0,COLOR:BLACK
1-7:MYLAR:YELLOW
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500M Ω MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(凡準)	AU
RJN-033-1L12HG	G/F
RJN-033-1L12H6	30u

TABLE:

30μ"		-02	WHITE NI	YE
G/F		-01	WHITE NI	YE
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF



SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址：東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY	左胜胜
----------	-----

CHECKED BY

APPROVED BY

左胜胜

ITEM

PART NO

MINI RJ45 PHONE JACK(板上6.80mm)

CD4521052010-XX

ANGLE PROJECTION



UNIT

SCALE

mm

3/12/2019

TOLERANCE

.X±0.30
.XX±0.20

DATE _____

03/12/2019