
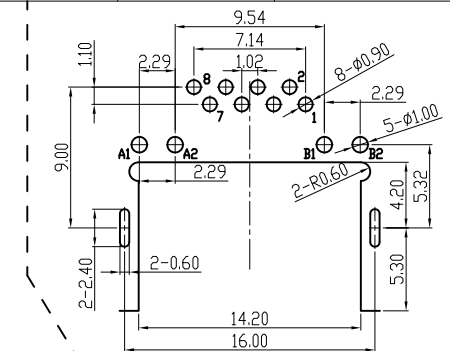
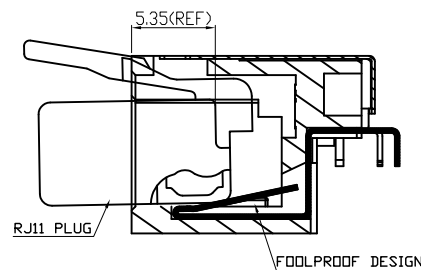
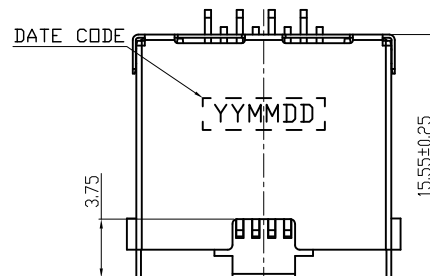


RoHS
Compliant

Halogen Free




REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	09/08/2015	鐘 杭

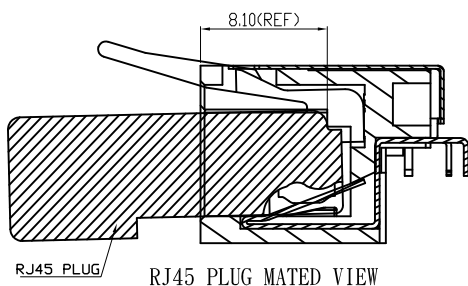

RECOMMENDED PCB LAYOUT
TOLERANCE: ±0.05mm
RECOMMENDED PCB THICKNESS: 1.20±0.05

Part Number(客戶)	AU
2RJ1735-000111F	30u"


VIEW A SCALE 5:1

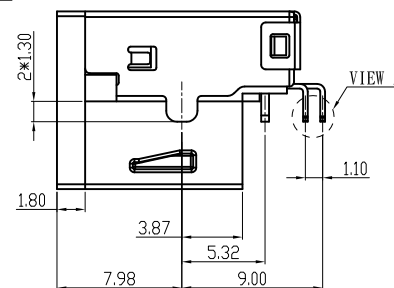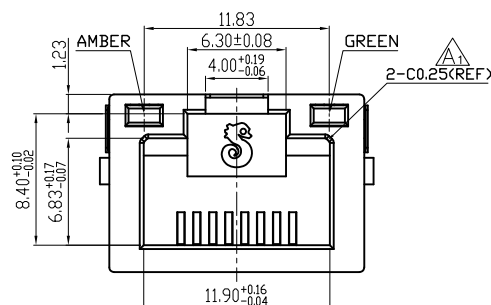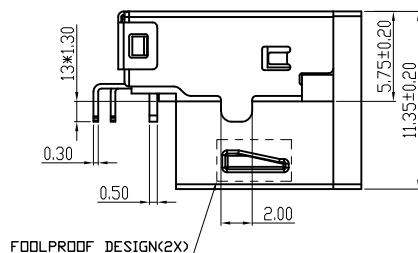

NOTES:
1.MATERIAL:
1-1:HOUSING:PA4T-GF30 FR(40)JUL 94V-0, 
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:GREEN/AMBER,TREATMENT:TIN
1-5:MYLAR:YELLOW
1-6:DEFEND:PC(E6808)JUL 94V-0,
COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

LED ELECTRICAL CHARACTERISTIC					
NODE	COLOR	WAVELENGTH(nm)			
A1(+)	A2(-)	AMBER	585(min)	595(max)	A1 → A2
B1(+)	B2(-)	GREEN	566(min)	574(max)	B1 → B2

SUGGESTION OPENING

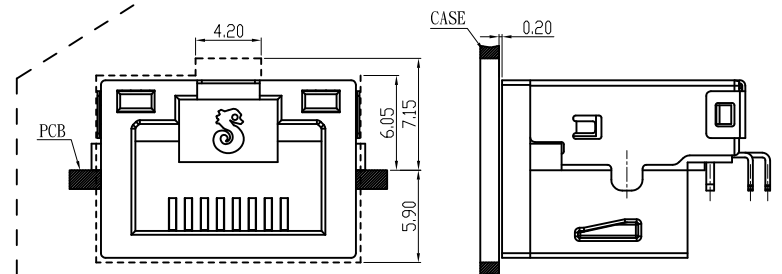

東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	鐘 杭	ITEM	RJ45 PHONE JACK(板上5.75mm)		ANGLE PROJECTION	UNIT	mm
CHECKED BY						SCALE	1:1
APPROVED BY		PART NO	CD4531042004	TOLERANCE	.X±0.25 .XX±0.15	DATE	09/08/2015