

RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	09/02/2015	鐘 杭

A

B

C

D

E

F

A



B

C



D

E

F

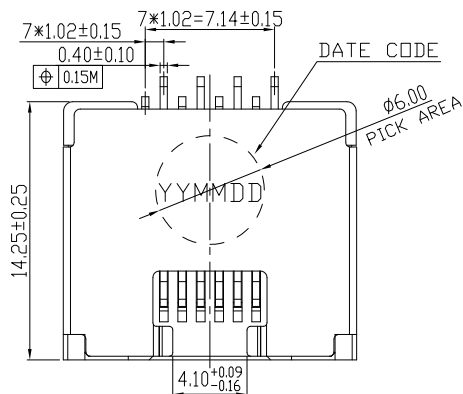

VIEW A SCALE 5:1

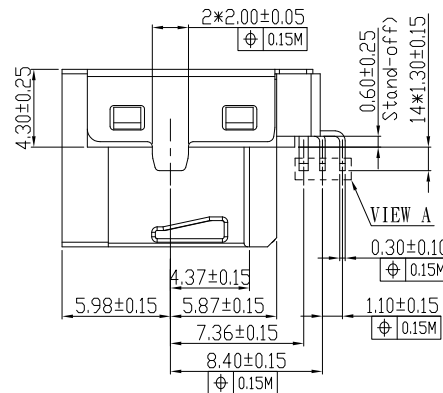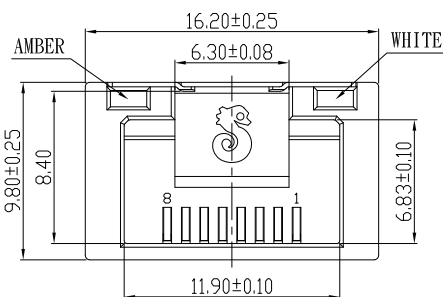


VIEW A

Part Number(客戶)	AU
2RJ1738-000111F	G/F
2RJ1738-000211F	30u"

LED ELECTRICAL CHARACTERISTIC			
NODE	COLOR		
A1(+) A2(-)	AMBER	A1- $\rightarrow$	A2
B1(+) B2(-)	WHITE	B1- $\rightarrow$	B2

RJ45 PLUG MATED VIEW

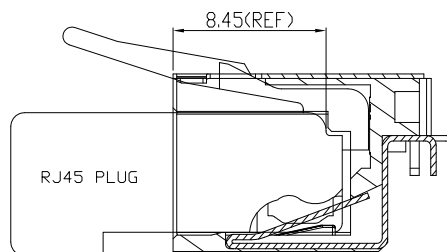

RJ11 PLUG MATED VIEW



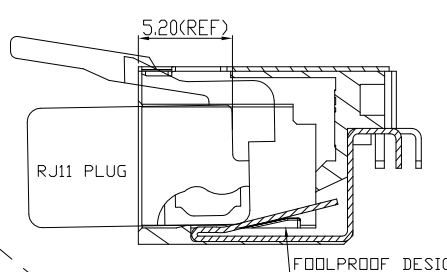


TABLE:

30u"	CD4531042003	-02	WHITE NI	YES
G/F	CD4531042003	-01	WHITE NI	YES
AU PLATING	PART NUMBER-XX	SHELL PLATING	HF	

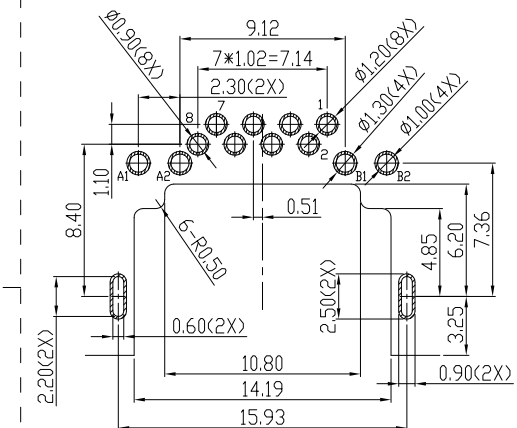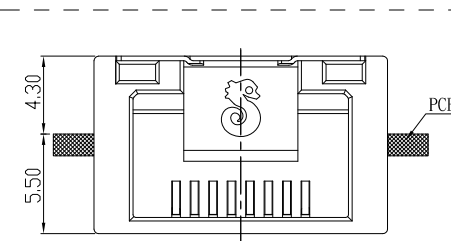

NOTES:

- 1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);JUL 94V-0,
COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 30u" MIN.
- 1-3:SHELL:SUS(201);T=0.25mm,TREATMENT:50u" NI
- 1-4:LED:AMBER/WHITE,TREATMENT:TIN
- 1-5:DEFEND:LCP(E6808);JUL 94V-0,
COLOR:BLACK
- 1-6:MYLAR:YELLOW
- 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500M Ω MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	鐘 杭	ITEM	
CHECKED BY		PART NO	
APPROVED BY			

MINI RJ45 PHONE JACK(板上4.30mm)

CD4531042003-XX

ANGLE PROJECTION	UNIT	mm
	SCALE	1:1
TOLERANCE	DATE	
.X $\pm$ 0.20 .XX $\pm$ 0.10		