
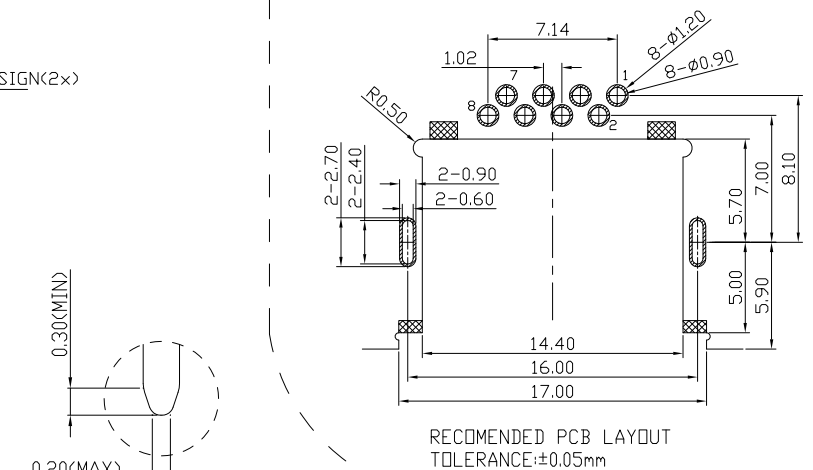
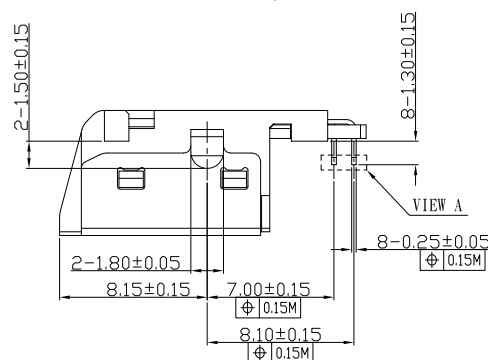
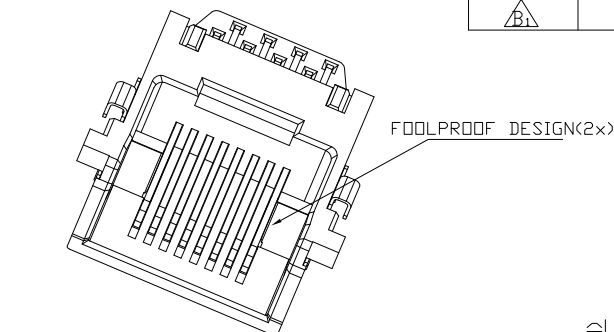
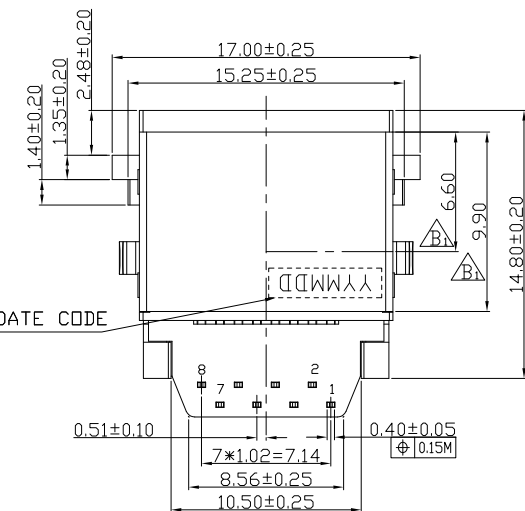
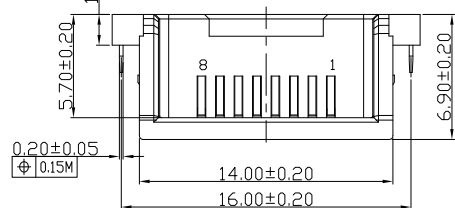


RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
B0	取消吸蓋	ECR	01/13/2019	王 奔
B1	修改噴印字碼位置	—	04/08/2019	王 奔

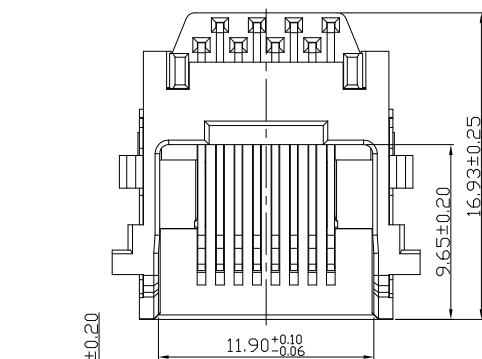

NOTES:

- MATERIAL:
1-1: HOUSING: PA4T(TX1)/PA10T+35%GF(VICNYL R635NH); UL 94V-0, COLOR: BLACK
1-2: TERMINAL: PHOSPHOR BRONZE(C5210R-EH); T=0.25mm
TREATMENT:
1. GOLD FLASH ON CONTACT AREA, MATTE SN 50u" MIN
ON SOLDER TAIL, ALL OVER NI 50u" MIN.
2. GOLD 30u" MIN ON CONTACT AREA, MATTE SN 50u" MIN
ON SOLDER TAIL, ALL OVER NI 50u" MIN.
1-3: SHELL: SUS(201); T=0.20mm, TREATMENT: 50u" NI
1-4: DEFEND: LCP(E130i); UL 94V-0, COLOR: BLACK
1-5: CAP(2X): LCP(E130i); UL 94V-0, COLOR: BLACK
- SPECIFICATIONS:
2-1. VOLTAGE RATING: 150VAC MAX.
2-2. CURRENT RATING: 1.5AMP MAX.
2-3. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
2-4. DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5. DURABILITY: 5000 CYCLES.
2-6. OPERATING TEMPERATURE: -30°C TO +70°C.
2-7. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(客戶)	AU
2RJ1755-000111F	G/F
2RJ1755-000211F	30u"



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY	王 奔	ITEM	半截式 RJ45 PHONE JACK(板上1.70mm)	ANGLE PROJECTION	UNIT	mm
CHECKED BY		PART NO	CD4531042015-XX		SCALE	1:1
APPROVED BY				TOLERANCE	.X±0.20 .XX±0.10	DATE