


RoHS Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△1	修改結構	—	01/04/2018	王奔
△2	增加LED防呆	—	02/05/2018	王奔

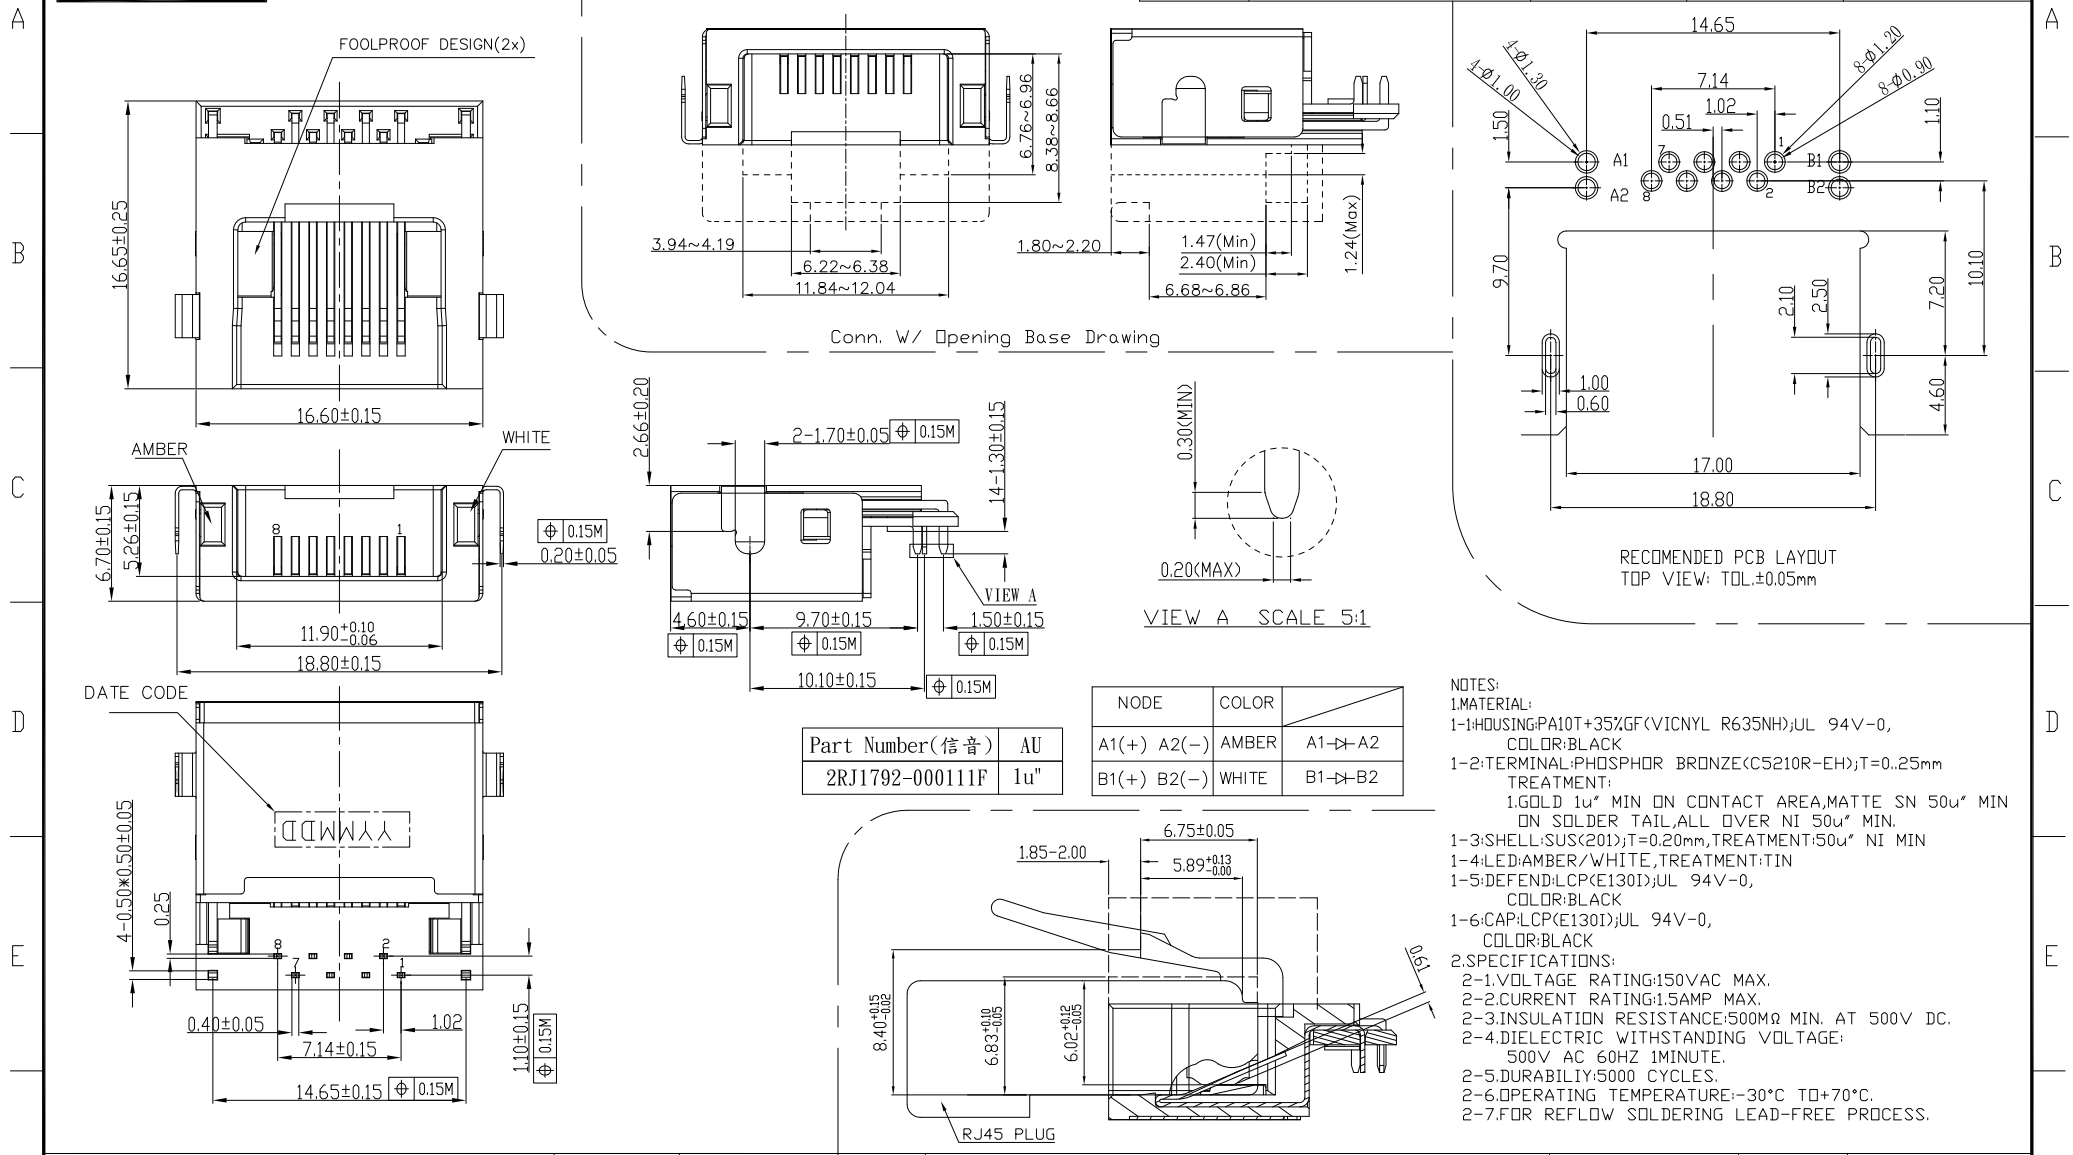

- NOTES:
- 1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:
1.GOLD 1u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI MIN
1-4:LED:AMBER/WHITE,TREATMENT:ITIN
1-5:DEFEND:LCP(E130I);UL 94V-0, COLOR:BLACK
1-6:CAP:LCP(E130I);UL 94V-0, COLOR:BLACK
 - 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE: 500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TD+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Part Number(信音)	AU
2RJ1792-000111F	1u"

NODE	COLOR	DIAGRAM	
A1(+)	A2(-)	AMBER	A1↔A2
B1(+)	B2(-)	WHITE	B1↔B2

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	王奔	ITEM	半截式 RJ45 PHONE JACK(板上2.35mm)	ANGLE PROJECTION	UNIT	mm	
CHECKED BY		PART NO	CD4531062021		SCALE	1:1	
APPROVED BY					TOLERANCE	.X±0.20 .XX±0.10	DATE