

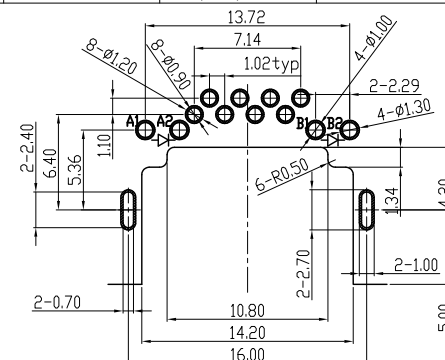

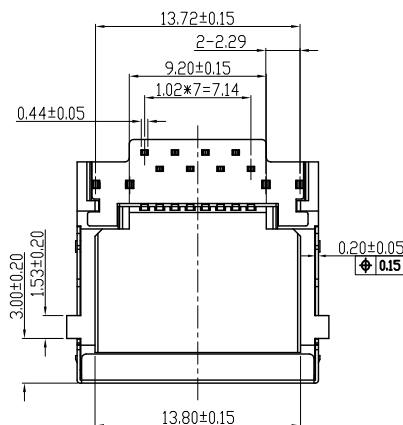
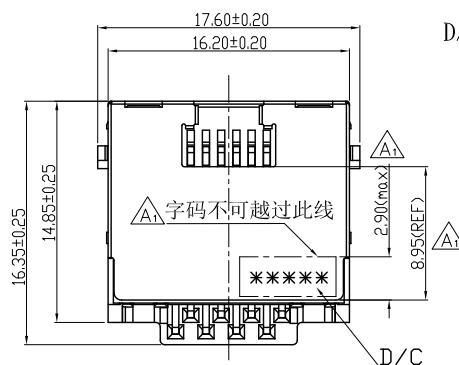

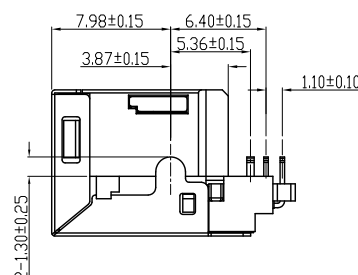


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	05/09/2018	鍾 杭
A	修改字碼位置	ECR	03/12/2019	左胜胜

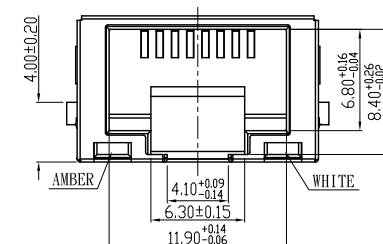

RECOMMENDED PCB LAYOUT
TOLERANCE:±0.05mm
RECOMMENDED PCB THICKNESS:1.20±0.05

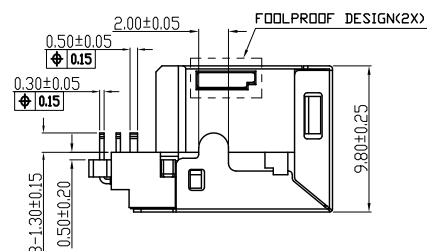

D/C: 15023
星期三
第十周
2015年

TABLE:

30μ	CD4521072006	-02	WHITE NI	YES
G/F		-01	WHITE NI	YES
AU PLATING	PART NUMBER	-XX	SHELL PLATING	HF

LED ELECTRICAL CHARACTERISTIC				
NODE	COLOR	WAVELENGTH	FORWARD CURRENT	
A1(+) A2(-)	WHITE	—	If=20mA	
B1(+) B2(-)	AMBER	584-594nm	If=20mA	

NOTES:
1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.30mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 30u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:LED:WHITE/AMBER,TREATMENT:IN
1-5:STOPPLE:PC(E130I);UL 94V-0,COLOR:BLACK
1-6:DEFEND :PC(E130I);UL 94V-0,COLOR:BLACK
1-6:MYLAR:YELLOW
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:500MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY 左胜胜
CHECKED BY
APPROVED BY

ITEM MINI RJ45 PHONE JACK(板上4.0mm 四)+柵欄
452專用

PART NO CD4521072006-XX

ANGLE PROJECTION
UNIT mm
SCALE 1:1
DATE 03/12/2019
TOLERANCE .X±0.20
.XX±0.10