

RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A	新訂圖面	—	09/20/2017	鐘 杭
B0	工程变更, 增加Stand Off	ECN	4/2/2019	左胜利
B1	修改字码位置及大小	ECR	4/9/2019	左胜利

A



B

C


D

E

F

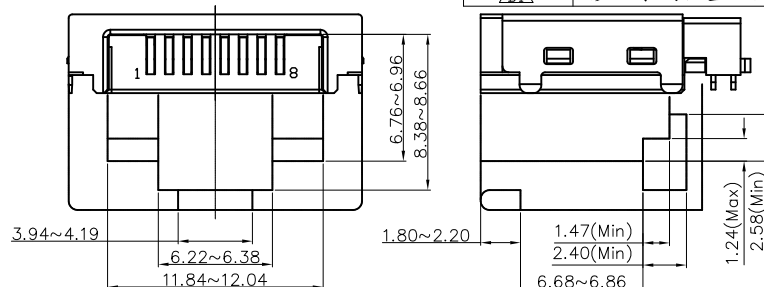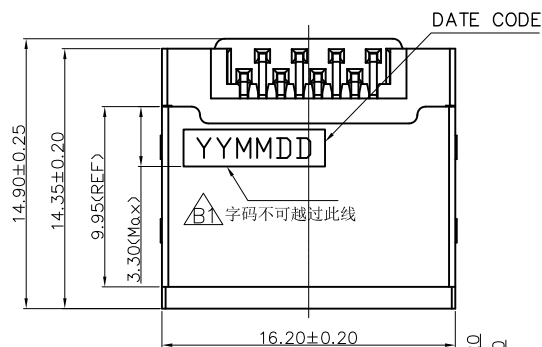





Conn. W/ Opening Base Drawing

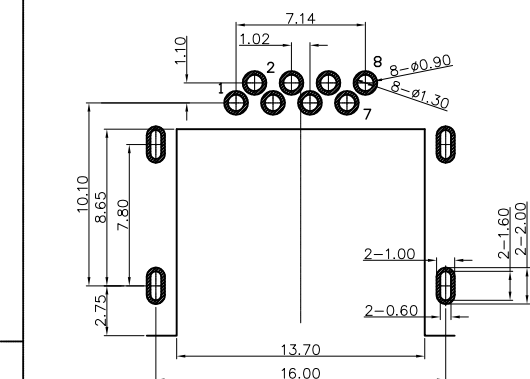

Part Number(客户)	AU
2RJ1754-002111F	G/F
2RJ1754-002211F	30u"

NOTES:

- 1.MATERIAL:
1-1:HOUSING:PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN ON SOLDER TAIL,ALL OVER NI 50u" MIN.
- 1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
- 1-4:DEFEND:LCP(E130I);UL 94V-0, COLOR:BLACK
- 1-5:CAP:LCP(E130I);UL 94V-0, COLOR:BLACK
- 2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

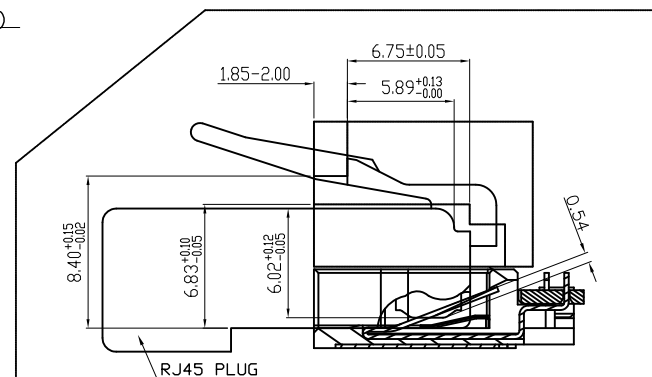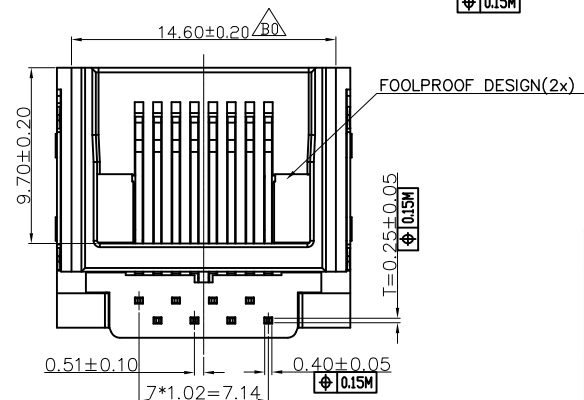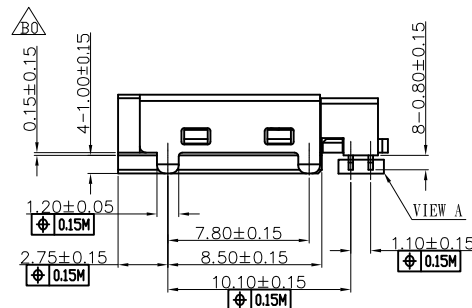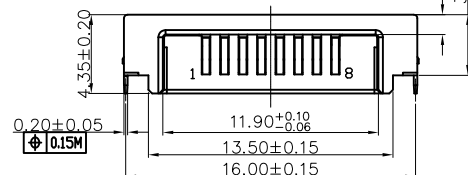

東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD.(DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY 左胜利

CHECKED BY

APPROVED BY


ITEM

半截式 RJ45 PHONE JACK(板上3.35mm)

PART NO

CD4531062018-XX

ANGLE PROJECTION



UNIT

mm

SCALE

1:1

TOLERANCE

.X±0.20
.XX±0.10

DATE

1

2

3

4

5

6

7

8