

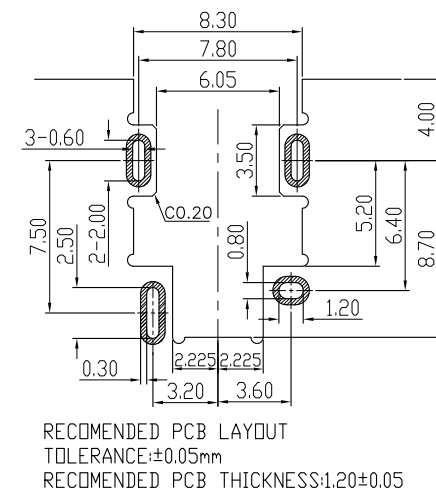
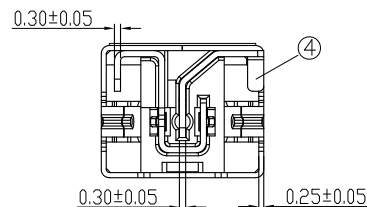
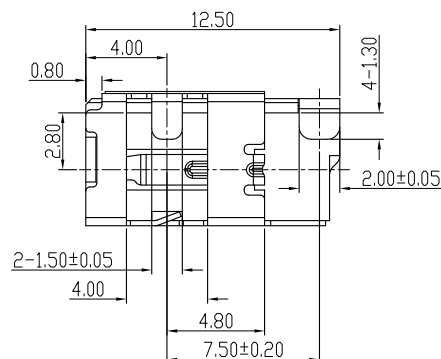



REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	06/02/2016	鍾 杭
A1	修改電鍍規格	ECR	03/19/2018	左勝勝

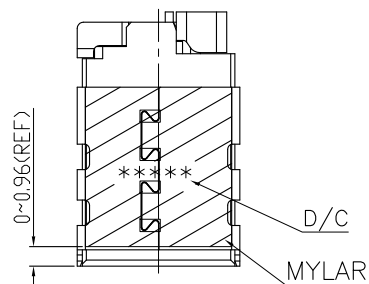

SPECIFICATIONS:

1.ELECTRICAL SPEC:

- 1-1.RATED CURRENT:11.5A
- 1-2.RATED VOLTAGE:20V
- 1-3.INSULATION RESISTANCE:100MΩ MIN.AFTER BY 500V DC FOR 1MINUTE
- 1-4.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1MINUTE
- 1-5.CONTACT RESISTANCE:30mΩ MAX(INITIAL)

2.MECHANICAL SPEC:

- 2-1.INSERTION FORCE:3.0Kgf MAX
- 2-2.WITHDRAWAL FORCE:
INITIAL:0.70 Kgf MIN
AFTER LIFE TEST:0.50 Kgf MIN



3.WEIGHT:1.0 GRAM

4.TEMPERATURE RISE CAN'T EXCEED 30°C MAX

5.LIFE TEST(INSERTION/WITHDRAWAL):5000 CYCLES MIN

6.LOW HALOGEN SPEC:

- 6.1 Br< 900 ppm
- 6.2 Cl< 900 ppm
- 6.3 Br+Cl< 1500 ppm

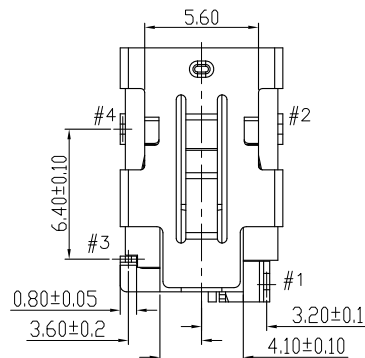

SECTION:A-A



Build of material:

NO	DESCRIPTION	QTY	MATERIAL	FINISH(OR COLOR)
4	HP SLIM DC IN JACK OFFSE-DETECT PIN	1	PHOSPHOR BRONZE(C5210R) T=0.30±0.05mm	30u" Pd/Ni MIN WITH 5u" Au ON CONTACT AREA, WATTE SN 80u" MIN ON SOLDER TAIL, ALL OVER NI 50u" MIN.
3	HP SLIM DC IN JACK OFFSE-POWER PIN	1	COPPER ALLOY(C7035); T=0.30±0.03mm	30u" Pd/Ni MIN WITH 5u" Au ON CONTACT AREA, WATTE SN 80u" MIN ON SOLDER TAIL, ALL OVER NI 50u" MIN.
2	HP SLIM DC IN JACK OFFSE-HOUSING	1	PA4T (DSM)	BLACK
1	HP SLIM DC IN JACK OFFSE-SHELL	1	COPPER ALLOY(C7035); T=0.25±0.03mm	30u" Pd/Ni MIN WITH 5u" Au ON CONTACT AREA, ALL OVER NI 50u" MIN.

XX	Part Number(凡準)	AU
01	DCJ-019-1N03H6	30u"
02	DCJ-019-1N03HP	30u" Pd/Ni 5u" Au
03	DCJ-019-1N03H1	5u"
04	DCJ-019-1N03HG	G/F



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 左勝勝

CHECKED BY

APPROVED BY

ITEM

DC JACK 沉板式 8.0*6.5

(CH=2.80)

PART NO


CD4521052006

TOLERANCE

ANGLE PROJECTION

UNIT

mm



SCALE

1:1

DATE