



內, 外彈片; 母端子導通
剖視圖





外彈片導通

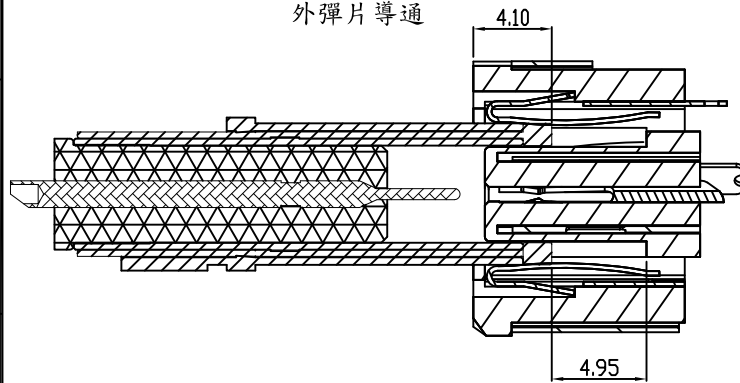

內彈片導通

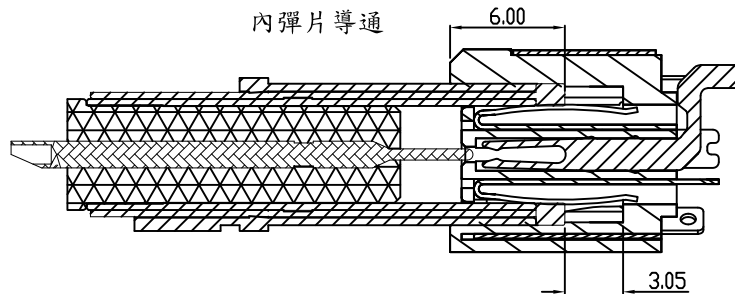


母端子導通

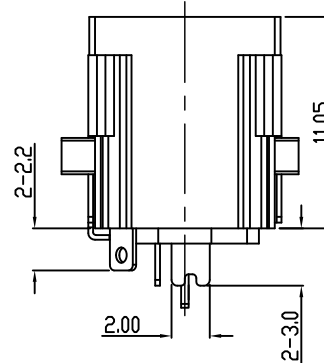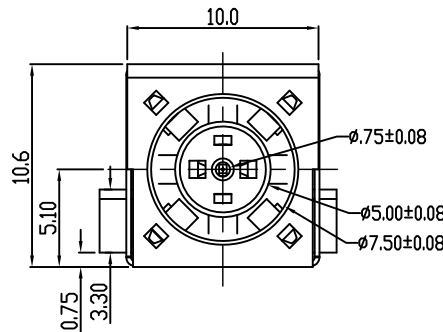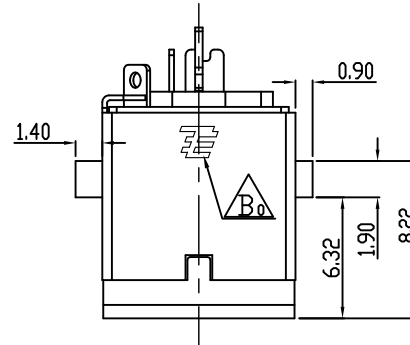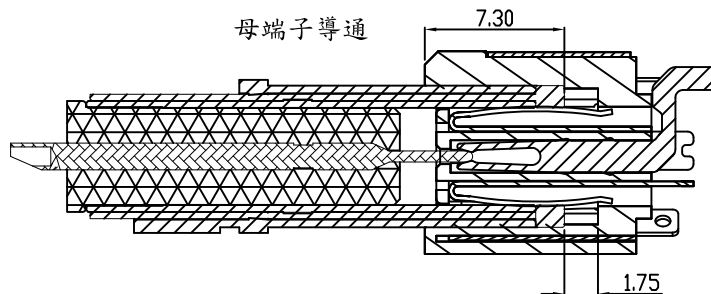

SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

- 1.1 CONNECTOR RATED CURRENT:10A&30%ΔT MAX.
OVER AMBIENT.
RATED VOLTAGE:20V AC
- 1.2 INSULATION RESISTANCE:100 MOHMS MIN AT
100V DC AFTER 1 MINUTE.
- 1.3 DIELECTRIC WITHSTANDING VOLTAGE:
150V AC FOR 1MINUTE.
- 1.4 CONTACT RESISTANCE:30 MOHMS MAX.
2. MECHANICAL CHARACTERISTICS:
2.1 INSERTION FORCE:30.0 N MAX;
EXTRACTION FORCE:3.5 N MIN.
- 2.2 DURABILITY(INSERTION/EXTRACTION CYCLES):
5000 CYCLEX.
- 3.OPERATING TEMPERATURE RANGE. -40°~85° .
- 4.HUMIDITY:85%RH MAX.

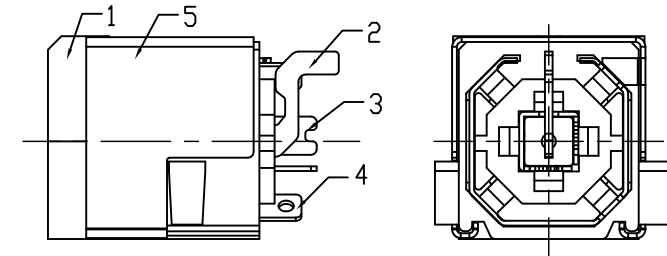

Build of material:

5	DC JACK卡板 焊線式-外殼	1	CD243982002-2	BRASS, T=0.25	鍍銀
4	DC JACK卡板 焊線式-外彈片	1	CD243982002-3	PHOSPHOR BRONZE, T=0.25	SILVER PLATED
3	DC JACK卡板 焊線式-內彈片	1	CD243982002-4	PHOSPHOR BRONZE, T=0.25	
2	DC JACK卡板 焊線式-母端子	1	CD243982002-5	PHOSPHOR BRONZE, T=0.40	
1	DC JACK卡板 焊線式-膠心	1	CD243982002-1	PBT	BLACK
項次	名 稱	數量	料 號	材 質	電鍍(或顏色)備註

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址: 東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 鐘 杭
CHECKED BY
APPROVED BY

ITEM DC JACK卡板 焊線式
PART NO CD243982002
TOLERANCE

ANGLE PROJECTION
SCALE 5:1
DATE 05/31/2010

UNIT mm
SCALE 5:1
DATE 05/31/2010

REVISION
DESCRIPTION
DATE



工程變更, 更換字碼 05/31/2010