

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A6	增加彈片尺寸	—	07/20/2018	王奔
A7	增加彈片尺寸	—	10/23/2018	王奔

A





B

C


D

E

F

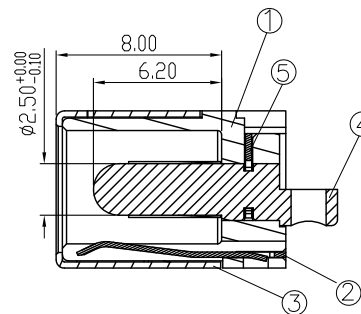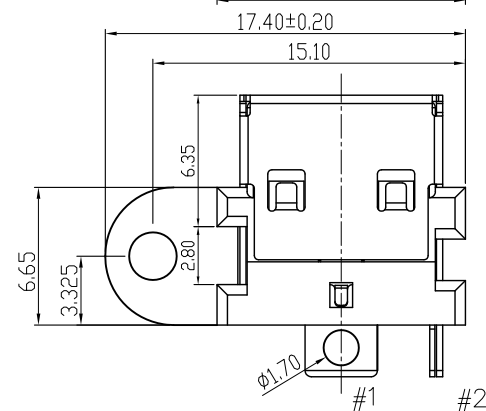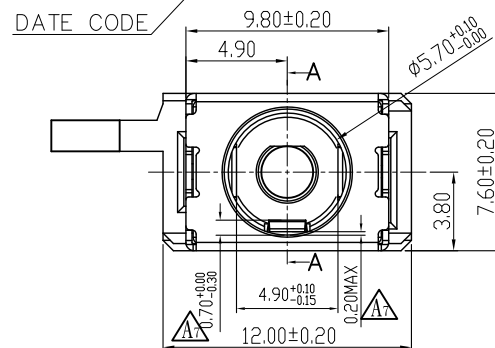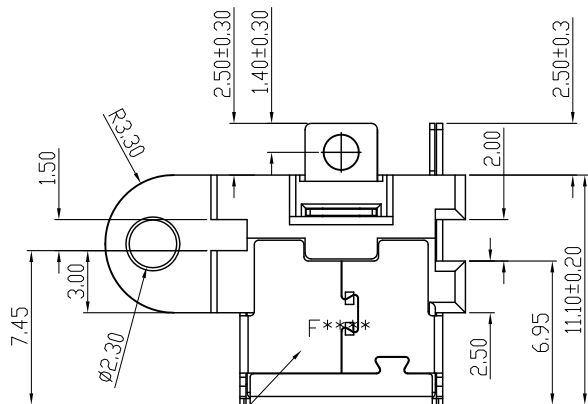

SECTION: A-A

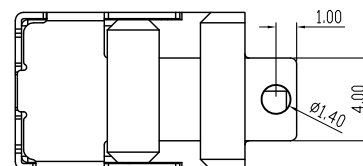

P/N: 075-0030-454

SPECIFICATIONS:

1.ELECTRICAL CHARACTERISTICS:

- 1-1.RATING:20V 10A
- 1-2.CONTACT RESISTANCE:15mΩ MAX.
- 1-3.DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR ONE MINUTE.
- 1-4.INSULATION RESISTANCE:100MΩ MIN. MEASURED BY 500VDC

2.MECHANICAL CHARACTERISTICS:





- 2-1.INSERTION FORCE:0.8~2.0kg(INITIAL/AFTER LIFE TEST)
- 2-2.WITHDRAWAL FORCE:0.8~2.0kg(INITIAL/AFTER LIFE TEST)

3.TEMPERATURE RISE CAN'T EXCEED 30°C.

4.LIFE TEST 8,000 CYCLES MIN.

5.MATERIAL:

- 5-1:HOUSING:PA4T(HF);UL 94V-0, COLOR:BLACK
- 5-2:TIP SPRING:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm TREATMENT:MATTE SN 80u"(ALL OVER NI 50u" MIN)
- 5-3:SHELL:SUS(201);T=0.30mm,TREATMENT:50u" NI
- 5-4:PIN:BRASS(C3604);TREATMENT:GOLD FLASH OVER NI 50u" NI
- 5-5:TERMINAL:SUS(304);T=0.30mm

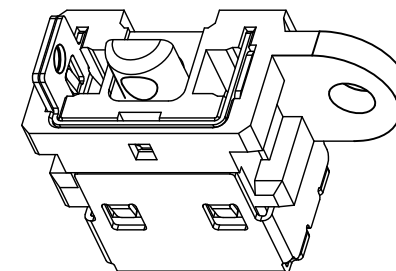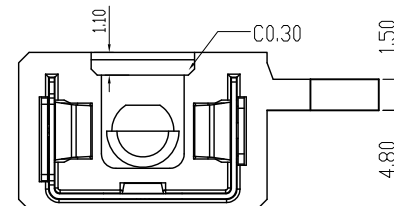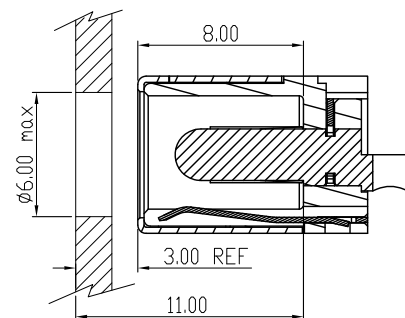


SCHEMATIC



D/C 說明: F4103

FOXCONN

星期三
第十周
2014年

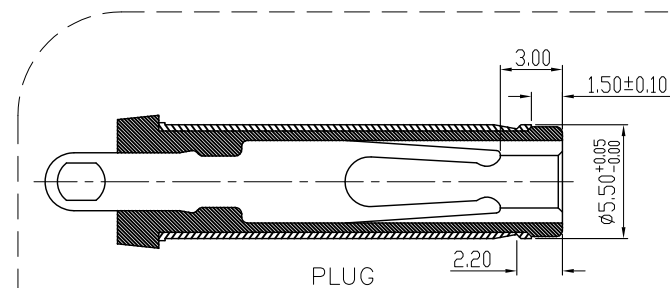

PLUG



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY	王奔	ITEM	DC POWER JACK(9.80*7.60)	ANGLE PROJECTION	UNIT	mm
CHECKED BY			+螺孔		SCALE	1:1
APPROVED BY		PART NO	CD4511042007	TOLERANCE	DATE	10/23/2018

1

2

3

4

5

6

7

8