





REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A2	修訂圖面	ECR	04/02/2013	陳 昊



NODE		COLOR	DOMINANT WAVELENGTH	FORWARD VOLTAGE	LUMINORS INTENSITY AT 20MA
P. B7(+)	P. B6(-)	AMBER	585-595nm	2. 6V MAX	37. 6-192. 4 MCD
P. B7(-)	P. B6(+)	WHITE	N/A	3. 7V MAX	400-1150 MCD



SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

1.1 CONNECTOR RATED CURRENT:10A&30° MAX

ΔT OVER AMBIENT

RATED VOLTAGE:20V DC

1.2 INSULATION RESISTANCE:100 MOHMS MIN AT 100V DC AFTER 1 MINUTE.

1.3 DIELECTRIC WITHSTANDING VOLTAGE:150V AC FOR 1 MINUTE.

1.4 CONTACT RESISTANCE: 30 mOHMS MAX.

2. MECHANICAL CHARACTERISTICS:

2.1 MATING FORCE:2.5KgF MAX;

UNMATING FORCE: INITIAL:0.6KgF MIN. AFTER 5000

CYCLES:0.5KgF MIN

2.2 DURABILITY(MATING/UNMATING CYCLES);5000 CYCLES.

3. OPERATING TEMPERATURE RANGE. -40°C~85°C

4. HUMIDITY:85% RH MAX

5. PRODUCT USER GUIDE:

MOISTURE SENSITIVE DEVICE MSL6-AFTER PACKING HAS BEEN





OPENED 8 HOURS,PARTS MUST BE BAKED FOR MIN. 5 DAYS AT

40°C& 5% RH

6. LED'S CHARACTERISTICS

Build of material:

9	HP DC JACK焊線式 (商務型) -LED	1	CD0001012011-9	雙色;琥珀色/白色	
8	HP DC JACK焊線式 (商務型) -后塞	1	CD0001012011-8	THERMOPLASTIC UL 94 V-0	BLACK
7	HP DC JACK焊線式 (商務型) -母端子	1	CD0001012011-7	PHOSPHOR BRONZE T=0.40mm	50u"NI/25u"PdNI/5u"AU
6	HP DC JACK焊線式 (商務型) -內彈片 (右)	1	CD0001012011-6	PHOSPHOR BRONZE T=0.30mm	50u"NI/25u"PdNI/5u"AU
5	HP DC JACK焊線式 (商務型) -內彈片 (左)	1	CD0001012011-5	PHOSPHOR BRONZE T=0.30mm	50u"NI/25u"PdNI/5u"AU
4	HP DC JACK焊線式 (商務型) -外彈片 (右)	1	CD0001012011-4	PHOSPHOR BRONZE T=0.30mm	50u"NI/25u"PdNI/5u"AU
3	HP DC JACK焊線式 (商務型) -外彈片 (左)	1	CD0001012011-3	PHOSPHOR BRONZE T=0.30mm	50u"NI/25u"PdNI/5u"AU
2	HP DC JACK焊線式 (商務型) -膠體	1	CD0001012011-2	SUS	30u"NI Min
1	HP DC JACK焊線式 (商務型) -外殼	1	CD0001012011-1	THERMOPLASTIC UL 94 V-0	BLACK
項次	名 稱	數量	料 號	材 質	電鍍(或顏色)

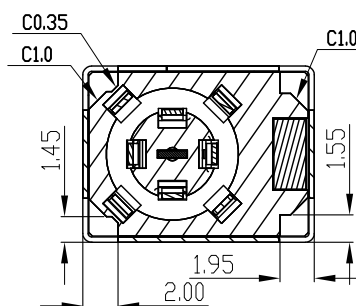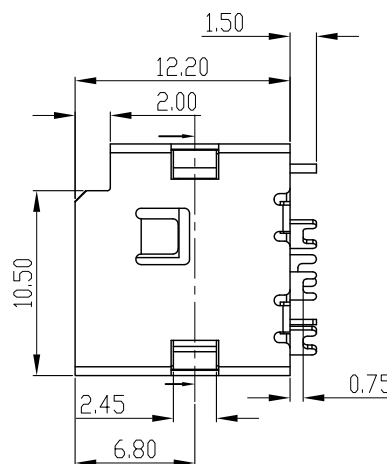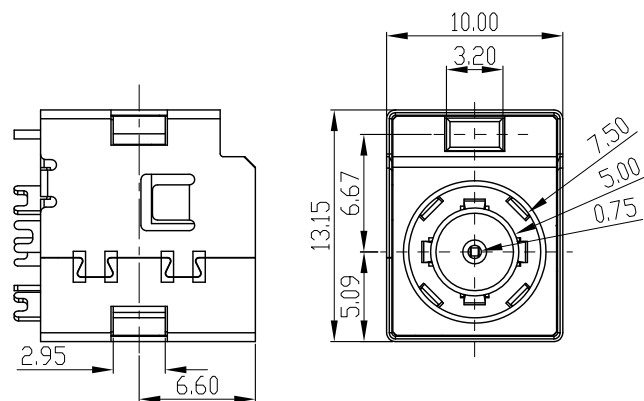

SECTION:A-A

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 陳 昊
CHECKED BY
APPROVED BY

ITEM HP DC JACK焊線式 (商務型)

PART NO CD0001012011

TOLERANCE

ANGLE PROJECTION



.X±0.30
.XX±0.20

UNIT

SCALE

DATE

mm

1:1

04/02/2013