

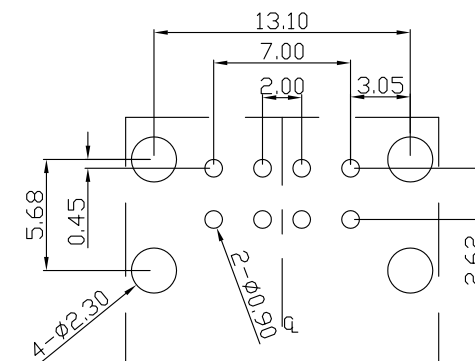
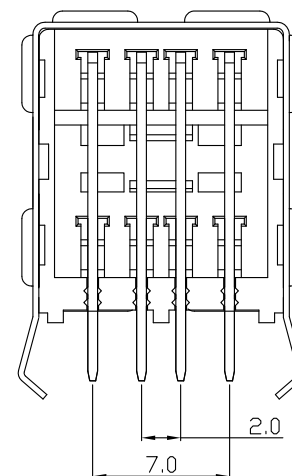
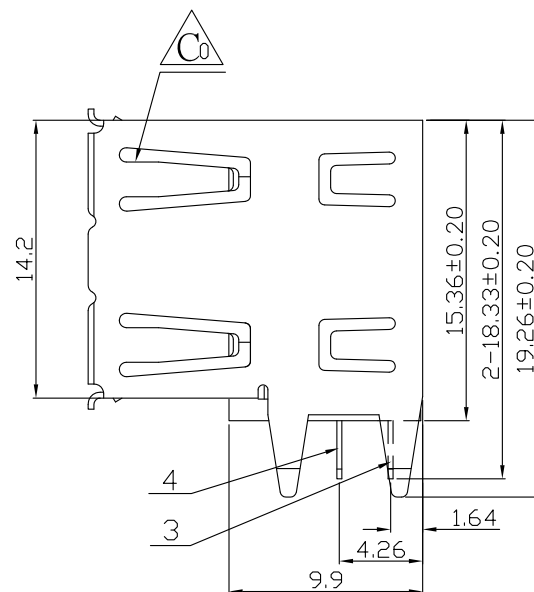


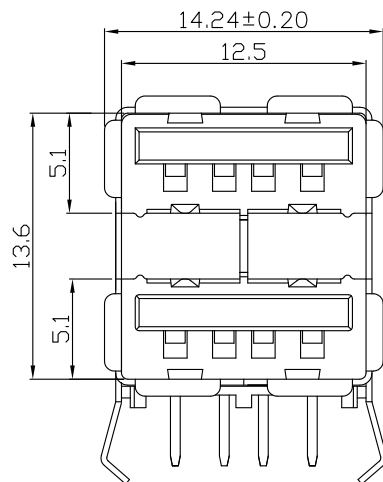

PC Board Layout
Component Side Shown

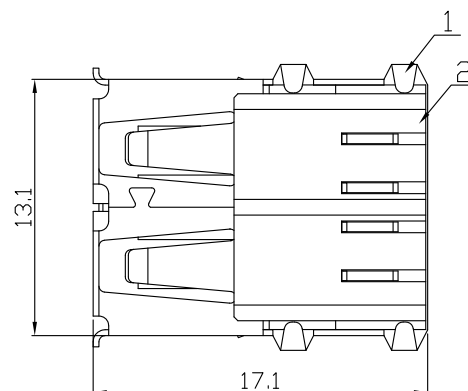

ELECTRICAL CHARACTERISTICS:
INSULATION RESISTANCE:
500 MEGOHMS MINIMUM
DIELECTRIC WITHSTANDING VOLTAGE:
1.5KV/AC 1MINUTE HOLD
MECHANICAL CHARACTERISTICS:
INSERTING AND PULLING
TESTER,5000 TIMES MIN

TABLE:

XX	電 鍍
11	G.F./TIN PLATED
12	3U" G./TIN PLATED
13	5U" G./TIN PLATED
14	10U" G./TIN PLATED
15	15U" G./TIN PLATED
16	20U" G.TIN PLATED
17	30U" G./TIN PLATED
18	50U" G./TIN PLATED

BOM:

項次	名 稱	料 號	材 質	電 鍍	數量	備註
1	2*USB+8P PHONE JACK USB本體外殼(SB0510-03)	276902003-3	黃銅(H), T=0.30±0.03MM	TIN PLATED	1	
2	2*USB+8P PHONE JACK USB膠心(SB0510-03)	276902003-4	PBT+30%GF,UL 94 V-0		1	
3	2*USB+8P PHONE JACK USB端子A(SB0510-03)	276902003-5	磷銅 T=0.25±0.03MM	SEE TABLE	4	
4	2*USB+8P PHONE JACK USB端子B(SB0510-03)	276902003-6	磷銅 T=0.25±0.03MM	SEE TABLE	4	

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 嚴義慧
CHECKED BY
APPROVED BY

ITEM 2*USB+8P PHONE JACK USB
母座(SB0510-03)
PART NO 276902003-14
TOLERANCE

ANGLE PROJECTION
UNIT MM
SCALE 2:1
DATE 09/20/2003
REVISION
DESCRIPTION
DATE

工程變更,舊圖作廢. 09/20/2003