



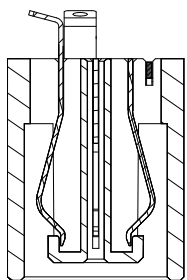



SECTION A-A

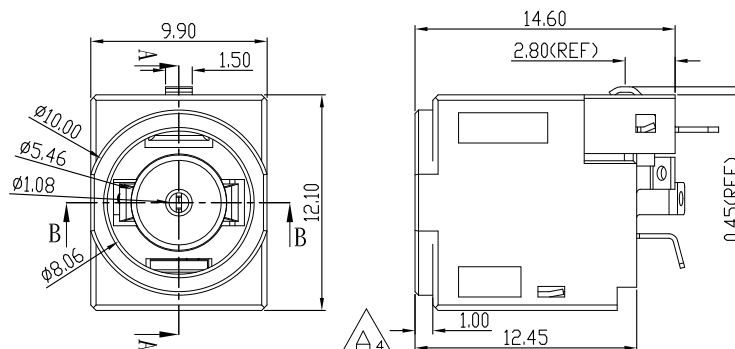

SECTION B-B



SPECIFICATION:

1.ELECTRICAL CHARACTERISTICS:

1.1 CONNECTOR RATED CURRENT:10A&30° ΔT MAX. OVER AMBIENT.
RATED VOLAGE:20V AC

1.2 INSULATION RESISTANCE:100 MOHMS MIN AT
100V DC AFTER 1 MINUTE.

1.3 DIELECTRIC WITHSTANDING VOLATAGE:150V AC FOR 1MINUTE.

1.4 CONTACT RESISTANCE:30 MOHMS MAX.

2. MECHANICAL CHARACTERISTICS:

2.1 INSERTION FORCE:3.0kgf MAX;
EXTRACTION FORCE:0.7kgf MIN.

2.2 DURABILITY(INSERTION/EXTRACTION CYCLES):5000 CYCLEX.

3.OPERATING TEMPERATURE RANGE. -40°~85°.

4.HUMIDITY:85%RH MAX.

TABLE:

客戶料號	XX	色 號
1-2117378-1	11	YELLOW(107C)
1-2117378-2	12	YELLOW(108C)
1-2117378-3	13	YELLOW(特殊色 91037#)


Build of

項次	名 稱	數量	料 號	材 質	電鍍(或顏色)	備 註
3	DC JACK 焊線式L480 (1-2117378-X)-母端子	1	CD2431002016-3	PHOSPHOR BRONZE, T=0.30mm	GOLD/TIN PLATED	
2	DC JACK 焊線式(2006545-1)-外彈片	1	CD243972010-2	PHOSPHOR BRONZE, T=0.30mm		
1	DC JACK 焊線式(2006545-1)-膠殼	1	CD2431002016-1X	High temperature plastic UL 94 V-0		SEE TABLE

 東莞世華電子有限公司
SHYH HWA ELECTRONICS CO., LTD.(DONGGUAN)
地址: 東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 陳 龍
CHECKED BY
APPROVED BY

ITEM DC JACK 焊線式L480
(1-2117378-X)
PART NO CD2431002016-XX TOLERANCE

ANGLE PROJECTION

UNIT mm
SCALE 1:1
DATE 01/03/2012
REVISION
DESCRIPTION
DATE