




內,外彈片;母端子導通
剖視圖

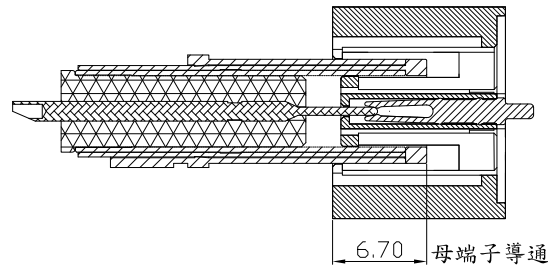







6.70 母端子導通

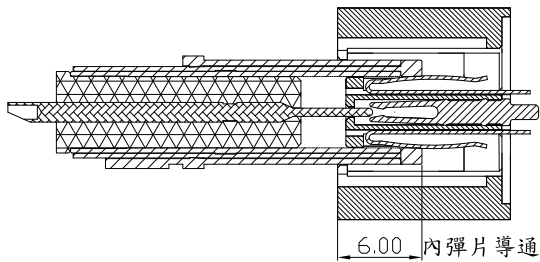

6.00 內彈片導通

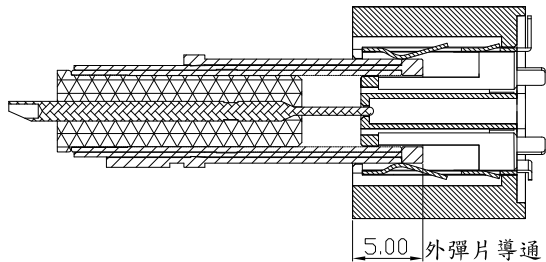

5.00 外彈片導通

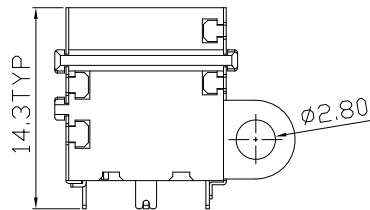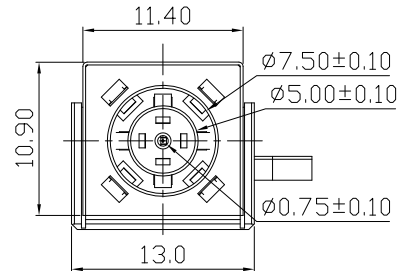

SPECIFICATION:

- 1.ELECTRICAL CHARACTERISTICS:
 - 1.1 CONNECTOR RATED CURRENT:10A&30°ΔT MAX. OVER AMBIENT.
 - 1.2 INSULATION RESISTANCE:100 MOHMS MIN AT 100V DC AFTER 1 MINUTE.
 - 1.3 DIELECTRIC WITHSTANDING VOLATAGE: 150V AC FOR 1MINUTE.
 - 1.4 CONTACT RESISTANCE:30 mOHMS MAX.
2. MECHANICAL CHARACTERISTICS:
 - 2.1 INSERTION FORCE:30.0 N MAX; EXTRACTION FORCE:3.5 N MIN.
 - 2.2 DURABILITY(INSERTION/EXTRACTION CYCLES): 5000 CYCLEX.
- 3.OPERATING TEMPERATURE RANGE. -40°~85° .
- 4.HUMIDITY:85%RH MAX.

Build of material:

項次	名稱	數量	料號	材質	電鍍(或顏色)	備註
5	DC JACK 焊線式-外殼 (2006248-1)	1	CD243972004-2	BRASS, T=0.20mm	拖鍍霧鍍	共用
4	DC JACK 焊線式-外彈片 (2006248-1)	1	CD243972004-3	PHOSPHOR BRONZE, T=0.25mm	SILVER PLATED	共用
3	DC JACK 焊線式-內彈片 (2006124-1)	1	CD243962008-6	PHOSPHOR BRONZE, T=0.25mm		共用
2	DC JACK 焊線式-母端子 (2006124-1)	1	CD243962008-4	PHOSPHOR BRONZE, T=0.40mm		共用
1	DC JACK 焊線式-膠心 (2006248-1)	1	CD243972004-1	PBT	BLACK	

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 唐忠洪
CHECKED BY
APPROVED BY

ITEM DC JACK 焊線式 (2006248-1)
PART NO CD243972004

ANGLE PROJECTION UNIT mm
SCALE 5:1
DATE 12/17/2009
REVISION DESCRIPTION DATE

修正電性要求 12/17/2009