
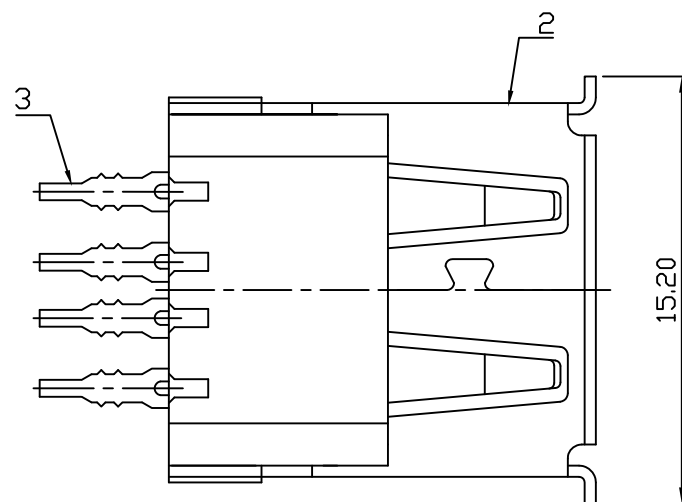
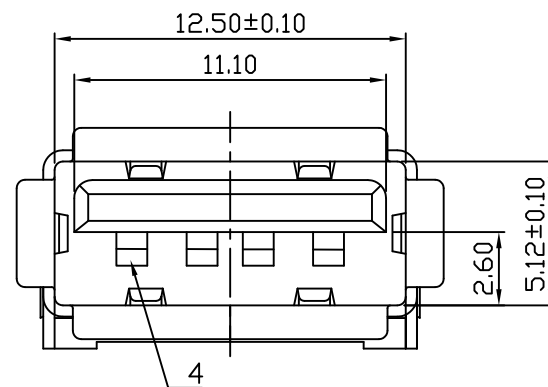


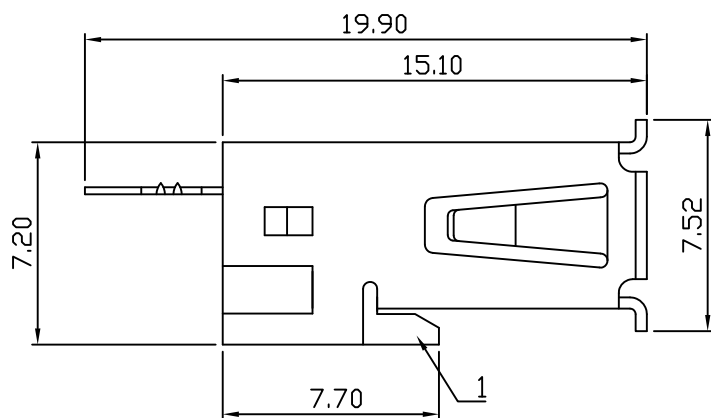

| 項次 | 名 稱   | 料 號         | 材 質                           | 電鍍或顏色                   | 數量 | 備註 |
|----|-------|-------------|-------------------------------|-------------------------|----|----|
| 1  | 母膠心   | UA0017000   | NYLON66,UL 94 V-0             | BEIGE                   | 1  |    |
| 2  | 本體護蓋  | UA00560XX   | BRASS,T=0.40±0.03MM           | TIN OR NICKEL PLATED    | 1  |    |
| 3  | 焊線端子  | UA00340XX   | PHOSPHOR BRONZE T=0.25±0.03MM | SEE TABLE               | 4  |    |
| 4  | 母座-後塞 | UA0018000-1 | PBT+15%GF,UL 94 V-0           | BLACK OR WHITE OR BEIGE | 1  | BA |

ELECTRICAL CHARACTERISTICS:  
 RATING:30V DC/AC 1A Max.  
 CONTACT RESISTANCE:30mΩ Max.  
 INSULATION RESISTANCE:100MΩ Min.at 500V DC.  
 DIELECTRIC STRENGTH:750V AC/1 minute.  
 INSERTION FORCE: 3.6kgf MAX  
 WITHDRAWAL FORCE: 1.0kgf MIN

TABLE:

| XX | 電 鍍                    |
|----|------------------------|
| 11 | G.F./TIN PLATED前金後錫    |
| 12 | 3U" G./TIN PLATED前金後錫  |
| 13 | 5U" G./TIN PLATED前金後錫  |
| 14 | 10u" G./TIN PLATED前金後錫 |
| 15 | 15U" G./TIN PLATED前金後錫 |
| 16 | 20U" G./TIN PLATED前金後錫 |
| 17 | 30U" G./TIN PLATED前金後錫 |
| 18 | 50U" G./TIN PLATED前金後錫 |



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY

CHECKED BY

APPROVED BY

ITEM


PART NO

USB CONNECTOR(series A)

-母座(無腳180°)

UA07200XX

ANGLE PROJECTION



TOLERANCE

UNIT

SCALE

DATE

MM

4:1

DATE

REVISION



REVISION

材質變更,舊圖作廢

DESCRIPTION

04/07/2003

DATE