

A

B

C

D

E

F

A


B

C

D

E

F

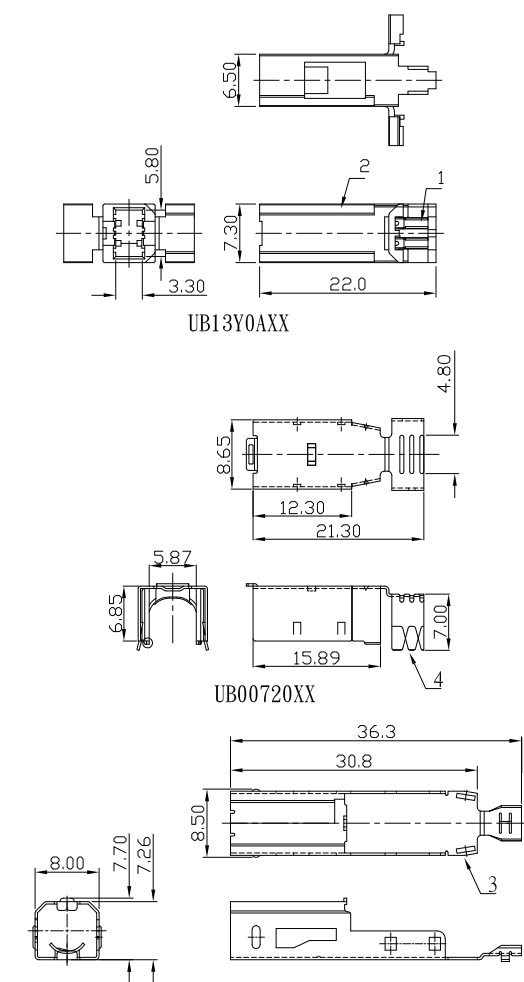

UB13Y0AXX

UB00720XX


UB0095002

UB0093000

UB0091000

UB0092000

UB0096000

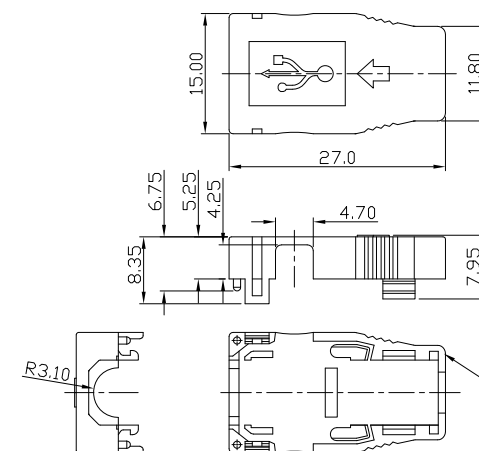

UB0097000

BOM

9	4P LOCK USB-B 一體式公頭-下蓋	UB0096000	ABS, UL 94 V-0, COLOR:BLACK.	1	
8	4P LOCK USB-B 一體式公頭-上蓋	UB0097000	ABS, UL 94 V-0, COLOR:BLACK.	1	
7	4P LOCK USB-B 一體式公頭-按鈕	UB0093000	PBT+15%GF, UL 94 V-0, COLOR:BLACK.	2	
6	4P LOCK USB-B 一體式公頭-彈片R	UB0092000	SUS(304) T=0.30±0.03MM	1	
5	4P LOCK USB-B 一體式公頭-彈片L	UB0091000	SUS(304) T=0.30±0.03MM	1	
4	4P LOCK USB-B 一體式公頭-上護蓋	UB00740XX	SPCC, T=0.30±0.03MM FINISH:SEE TABLE.	1	
3	4P LOCK USB-B 一體式公頭-下護蓋	UB0095000	SPCC, T=0.30±0.03MM FINISH:NICKEL PLATED.	1	
2	4P LOCK USB -B一體式公 頭-單件式	UB0094000	NYLON 66 OR PBT UL 94 V-0(不加纖)	1	
1	膠心 焊線端子	UB00360XX	BRASS(H), T=0.25±0.03MM FINISH:SEE TABLE.	4	
項目	名稱	料號	版本	規格	數量備註

ELECTRICAL CHARACTERISTICS:
RATING:30V DC/AC 1A Max.
CONTACT RESISTANCE:30mΩ Max.
INSULATION RESISTANCE:100MΩ Min.at 500V DC.
DIELECTRIC STRENGTH:750V AC/1 minute.
INSERTION FORCE: 3.6kgf MAX
WITHDRAWAL FORCE: 5.0kgf MIN
The use of ambient temperature:-55°C to +85°C.

**東莞世華電子有限公司**

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY	王焱生	ITEM	4P LOCK USB-B一體式公頭
CHECKED BY		PART NO	UB0090000
APPROVED BY		TOLERANCE	.X±0.2 .XX±0.10

ANGLE PROJECTION	UNIT	MM		
	SCALE	1:1		設計變更
DATE	11/19/2009	REVISION	DESCRIPTION	DATE