

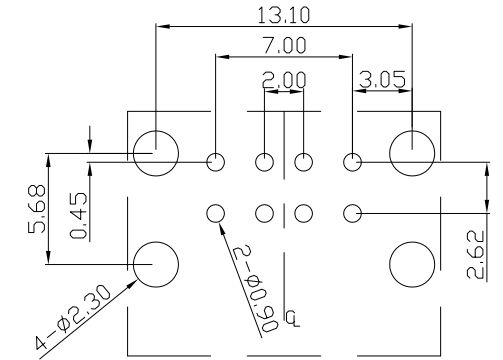
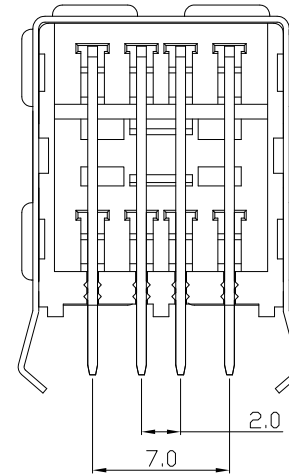
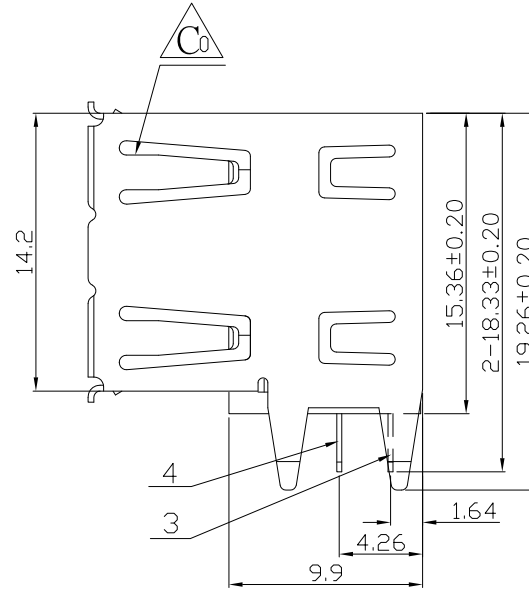


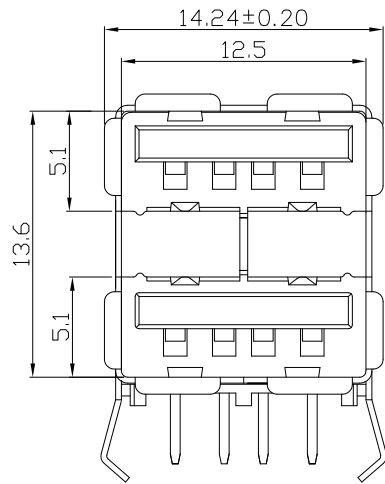

PC Board Layout
Component Side Shown

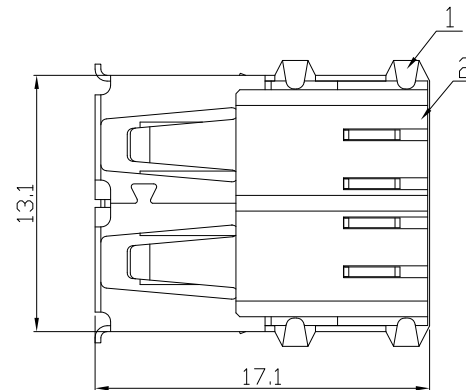

ELECTRICAL CHARACTERISTICS:

INSULATION RESISTANCE:

500 MEGOHMS MINIMUM

DIELECTRIC WITHSTANDING VOLTAGE:

1.5KV/AC 1MINUTE HOLD

MECHANICAL CHARACTERISTICS:

INSERTING AND PULLING

TESTER,5000 TIMES MIN

TABLE:

XX	電 鍍
11	G.F./TIN PLATED
12	3U" G./TIN PLATED
13	5U" G./TIN PLATED
14	10U" G./TIN PLATED
15	15U" G./TIN PLATED
16	20U" G.TIN PLATED
17	30U" G./TIN PLATED
18	50U" G./TIN PLATED

BOM:

項次	名 稱	料 號	材 質	電 鍍	數量	備註
1	2*USB+8P PHONE JACK USB本體外殼(SB0510-03)	276902003-3	黃銅(H), T=0.30±0.03MM	TIN PLATED	1	
2	2*USB+8P PHONE JACK USB膠心(SB0510-03)	276902003-4	PBT+30%GF,UL 94 V-0		1	
3	2*USB+8P PHONE JACK USB端子A(SB0510-03)	276902003-5	磷銅 T=0.25±0.03MM	SEE TABLE	4	
4	2*USB+8P PHONE JACK USB端子B(SB0510-03)	276902003-6	磷銅 T=0.25±0.03MM	SEE TABLE	4	



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 嚴義慧

CHECKED BY

APPROVED BY

ITEM


2*USB+8P PHONE JACK USB
母座(SB0510-03)

PART NO

276902003-14

TOLERANCE

ANGLE PROJECTION



.X±0.2
.XX±0.10

UNIT

SCALE

DATE

MM

2: 1

09/20/2003

REVISION



09/20/2003

工程變更,舊圖作廢. 09/20/2003

DESCRIPTION

DATE