
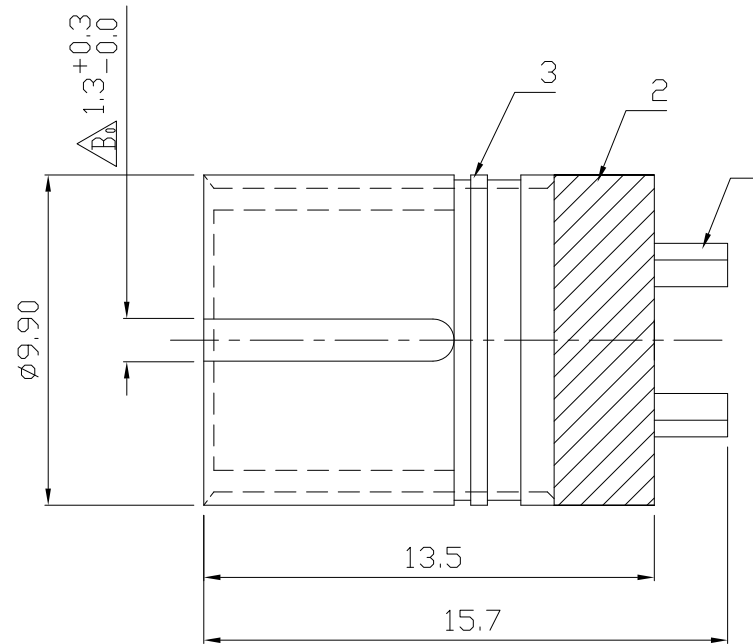


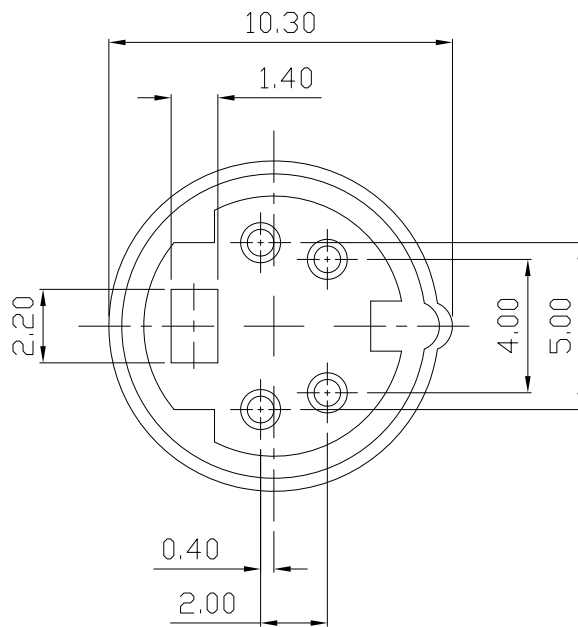

3	3-8P凸溝母銅管	FT0109101 FT0109103	1	BRASS, T=0.40±0.03MM NICKEL PLATED OR GOLD FLASH PLATED	
2	4P母膠心	FE0004001	1	PBT+15%GF, UL 94 V-0	
1	14.0L母PIN	PI30140XX	4	PHOSPHOR BRONZE, T=0.20±0.03MM PLATING:SEE TABLE	
項次	名 稱	料 號	數量	規 格	備註

ELECTRICAL CHARACTERISTICS:
 RATING:100V AC 1A MAX or
 12V DC 2A MAX
 INSULATION RESISTANCE:
 50MΩ MIN at 250V DC
 DIELECTRIC STRENGTH:
 250V AC/1 minute

TABLE:

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED.	06	GOLD PLATED 10u" MIN.
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.
02	SILVER PLATED.	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-7910020-1 FAX:0769-7910210

DRAWN BY 張敏華

CHECKED BY

APPROVED BY

ITEM

PART NO

4P凸溝母頭
(15.7L)

FX00401XX

TOLERANCE

ANGLE PROJECTION



.X±0.2
.XX±0.10

UNIT

SCALE

DATE

MM

5: 1

DATE



REVISION

公差變更,舊圖作廢

DESCRIPTION

06/18/2003

DATE