

12345678

A

B

C

D

E

F

A




B

C

D

E

F

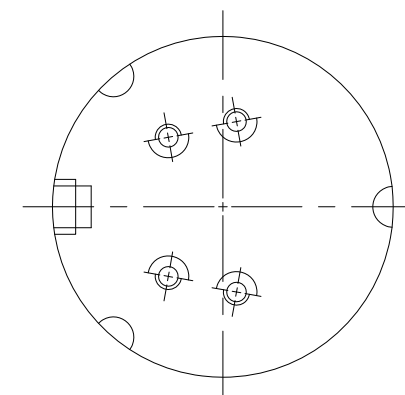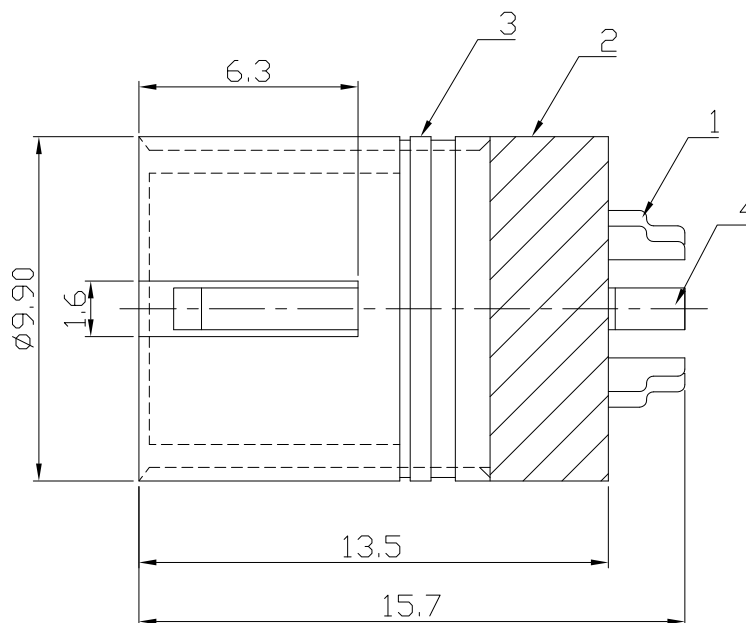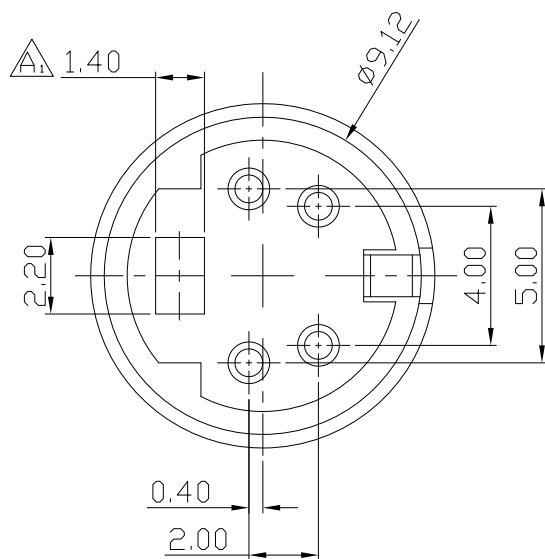

(焊線面)

4	14.7L接地片	1	SL1471202	?銅或鍍銅, T=0.30±0.03MM SILVER PLATED.	
3	3-8P 切溝母銅管	1	FT0309101	BRASS, T=0.40±0.03MM NICKEL PLATED OR GOLD FLASH PLATED	
2	4P 母膠心	1	FE0004001	PBT+15%GF, UL 94 V-0	
1	14.0L 杯口母PIN	4	PI31140XX	PHOSPHOR BRONZE, T=0.20±0.03MM PLATING: SEE TABLE	
項次	名稱	數量	料號	規格	備註

ELECTRICAL CHARACTERISTICS:
RATING: 100V AC 1A MAX or
12V DC 2A MAX
INSULATION RESISTANCE:
50mΩ MIN at 250V DC
DIELECTRIC STRENGTH:
250V AC/1 minute

TABLE:

XX	PLATING	06	GOLD PLATED 10u" MIN.
00	NICKEL PLATED.	07	GOLD PLATED 15u" MIN.
01	TIN PLATED.	08	GOLD PLATED 20u" MIN.
02	SILVER PLATED.	09	GOLD PLATED 30u" MIN.
03	GOLD FLASH PLATED.	10	GOLD PLATED 50u" MIN.
04	GOLD PLATED 3u" MIN.	11	G.F/TIN PLATED前金后錫.
05	GOLD PLATED 5u" MIN.	12	3U"G./TIN PLATED前金后錫.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY

丁麗

CHECKED BY

APPROVED BY

ITEM

4P 切溝杯口母頭+片


(溝6.3*1.6)

PART NO

FJ10401XX-D

TOLERANCE

ANGLE PROJECTION

 $X \pm 0.2$
 $.XX \pm 0.10$

UNIT

MM

SCALE

5:1

DATE

08/19/2004

REVISION



DESCRIPTION

尺寸修訂

08/19/2004

DATE

12345678