
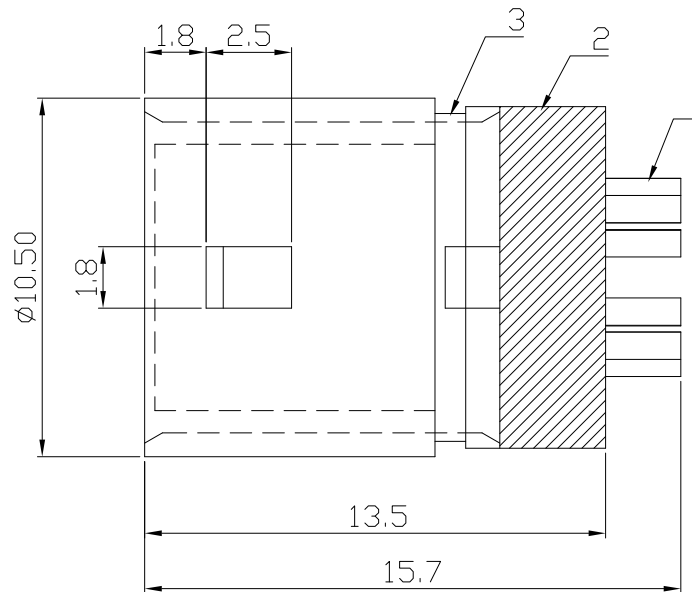


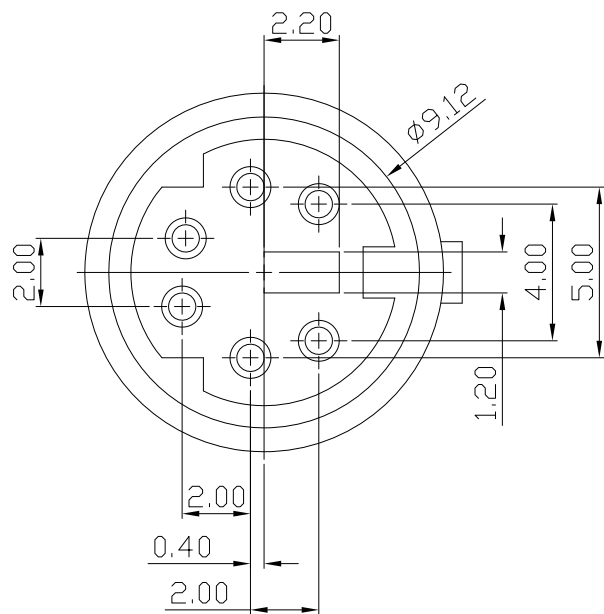

BUILD OF MATERIAL:

3	3-8P LOCK母銅管	1	FT05091XX	BRASS, T=0.70±0.05MM PLATED:SEE TABLE1	
2	6P 母膠心	1	FE0006001	PBT+15%GF, UL 94 V-0, BLACK	
1	14.0L 母PIN	6	PI30140XX	PHOSPHOR BRONZE, T=0.20±0.03MM PLATING:SEE TABLE2	
項次	名 稱	數量	料 號	規 格	備註

ELECTRICAL CHARACTERISTICS:

RATING: 100V AC 1A MAX or

12V DC 2A MAX

INSULATION RESISTANCE:

50MΩ MIN at 250V DC

DIELECTRIC STRENGTH:

250V AC/1 minute

INSERTION FORCE: 4.5kgf MAX.

WITHDRAWAL FORCE: 5.0kgf~10.0kgf

TABLE1:

XX	PLATING
01	NICKEL PLATED
03	GOLD FLADH PLATED

TABLE2:

XX	PLATING	05	GOLD PLATED 5u" MIN.
00	NICKEL PLATED.	06	GOLD PLATED 10u" MIN.
01	TIN PLATED.	07	GOLD PLATED 15u" MIN.
02	SILVER PLATED.	08	GOLD PLATED 20u" MIN.
03	GOLD FLASH PLATED.	09	GOLD PLATED 30u" MIN.
04	GOLD PLATED 3u" MIN.	10	GOLD PLATED 50u" MIN.



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 彭志婷

CHECKED BY

APPROVED BY

ITEM

PART NO

6P LOCK母頭
(15.7L)

FL00601XX

TOLERANCE

ANGLE PROJECTION

SCALE

DATE

REVISION

UNIT

5: 1

03/23/2012

DESCRIPTION

mm

增加TABLE表

03/23/2012

DATE