
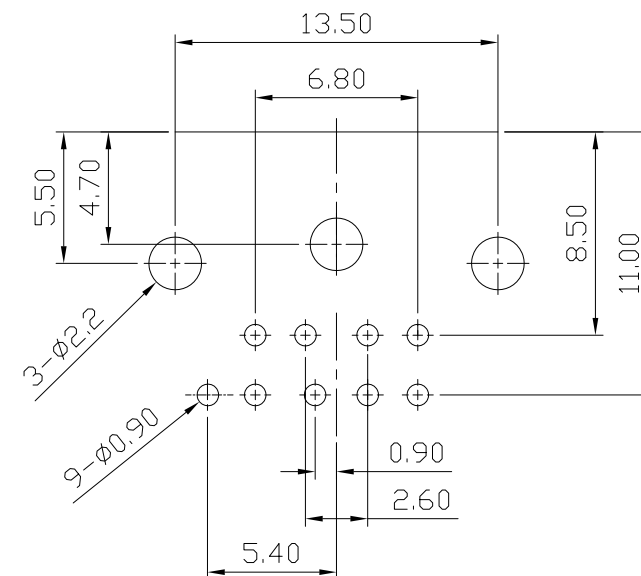
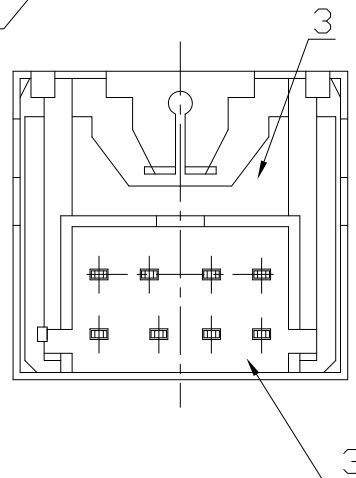
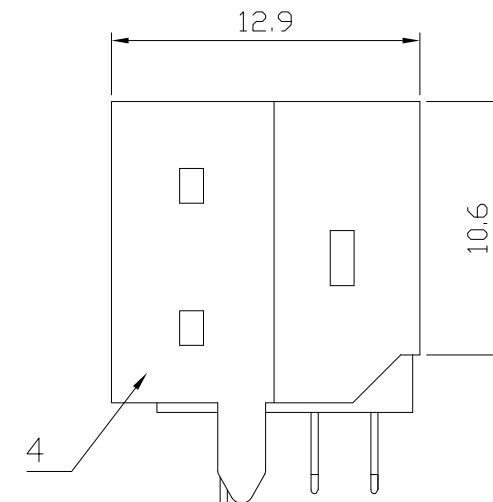


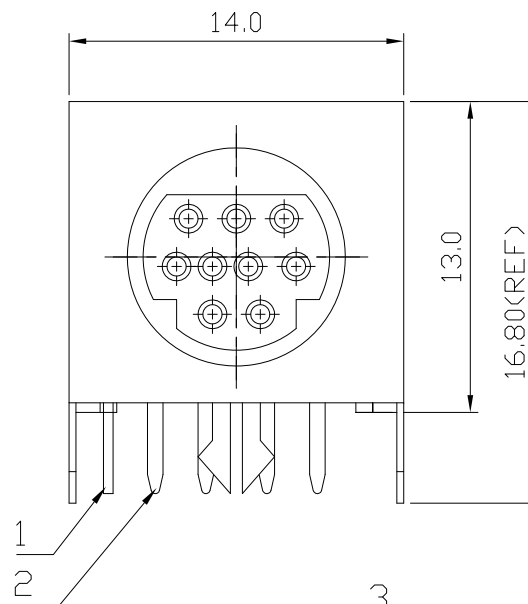

PCB LAYOUT
(BOTTOM VIEW)

ELECTRICAL CHARACTERISTICS:
RATING:12V DC 2A MAX
CONTACT RESISTANCE:
50 mΩ MAX
INSULATION RESISTANCE:
100 MΩ MIN at 250 V DC
DIELECTRIC STRENGTH:
250V AC/1 minute

4	SHELL	1	BRASS, T=0.40±0.03mm. PLATING: 鍍吃錫鎳.
3	INSULATOR	1	PBT+15%GF, UL 94 V-0
2	PIN	8	PHOSPHOR BRONZE, T=0.20±0.03mm. 3U" GOLD/TIN PLATED.
1	PIN	1	BRASS, T=0.40±0.03mm. 3U" GOLD/TIN PLATED.
項次	名稱	數量	規格

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)
地址: 東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 魏仁文
CHECKED BY
APPROVED BY

ITEM 8P-9針 PCB 90°-A
PART NO DP0800008-2 TOLERANCE

ANGLE PROJECTION	UNIT	mm			
	SCALE	2.5:1		將外殼電鍍改為鍍吃錫鎳	11/01/2005
.X±0.2 .XX±0.10	DATE	11/01/2005	REVISION	DESCRIPTION	DATE