

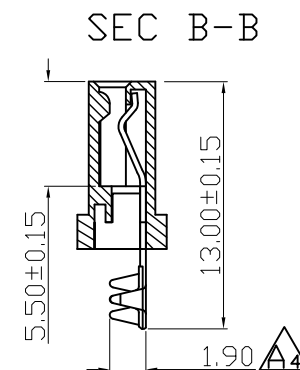
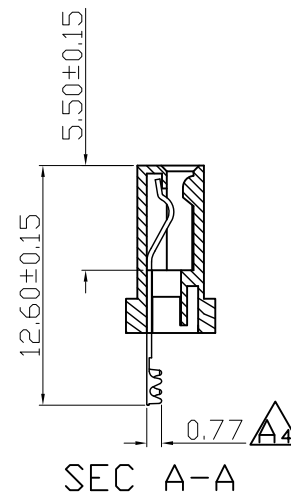
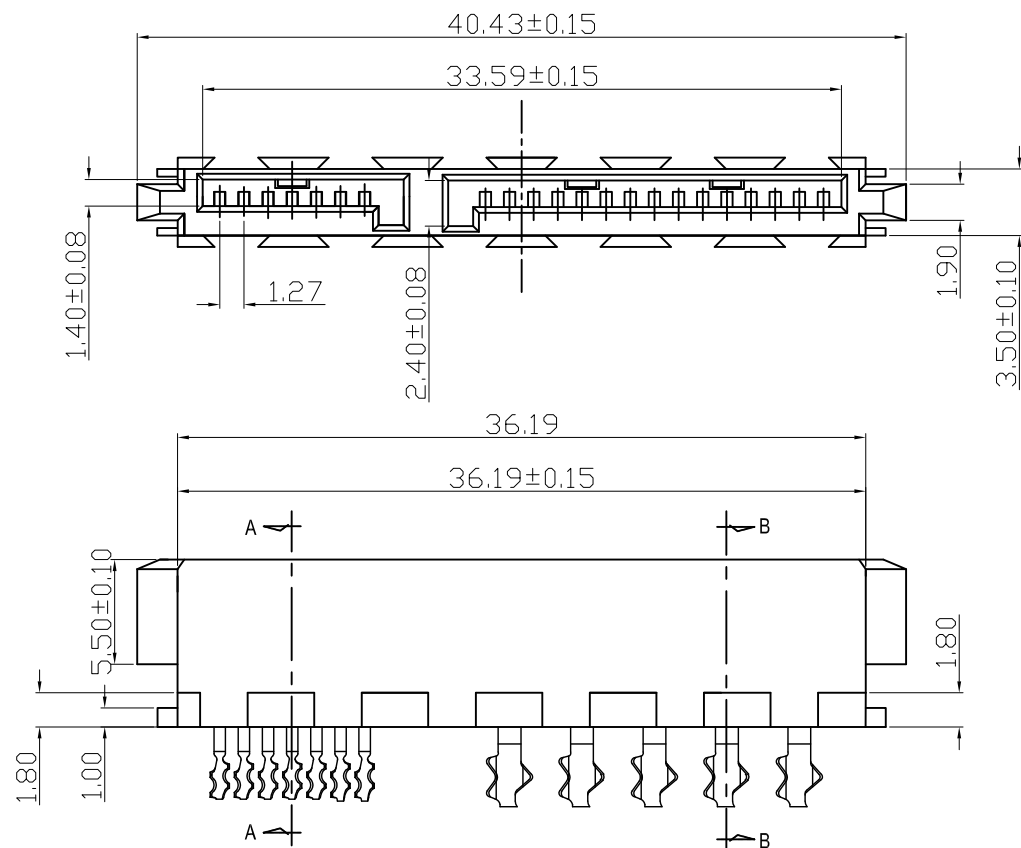


TABLE:

XX	PLATING
11	G.F./TIN PLATED 前金後錫
12	30U"G./TIN PLATED 前金後錫
13	50U"G./TIN PLATED 前金後錫
14	100U"G./TIN PLATED 前金後錫
15	150U"G./TIN PLATED 前金後錫
16	200U"G./TIN PLATED 前金後錫
17	300U"G./TIN PLATED 前金後錫
18	500U"G./TIN PLATED 前金後錫

Build of material:

2	7P+15P S-ATA母頭鉚線式(180°)-PIN	12	—	PHOSPHOR BRONZE T=0.25±0.03mm	SEE TABLE	
1	7P+15P S-ATA母頭鉚線式(180°)-膠心	1	—	PBT+30%, UL 94 V-0	黑色	
項次	名稱	數量	料號	材質	電鍍(或顏色)	備注

Specification:

- 1.Electrical Characteristics:
Voltage Current rating:1.5AMP
Dielectric Withstanding Voltage:500V AC 1min
Insulation Resistance:100MΩ min
Contact Resistance:40mΩ max
- 2.Environmental
Operating Temperature:-20°C to 85°C

東莞世華電子有限公司
SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)
地址:東莞市塘廈鎮諸佛嶺178工業區
TEL: 0769-7910020-1 FAX: 0769-7910210

DRAWN BY 鐘杭
CHECKED BY
APPROVED BY

ITEM 7P+15P S-ATA母頭鉚線式(180°)

PART NO CD000962009-XX-WL181

ANGLE PROJECTION UNIT MM
SCALE 1:1
DATE 02/16/2008
REVISION
DESCRIPTION
DATE