
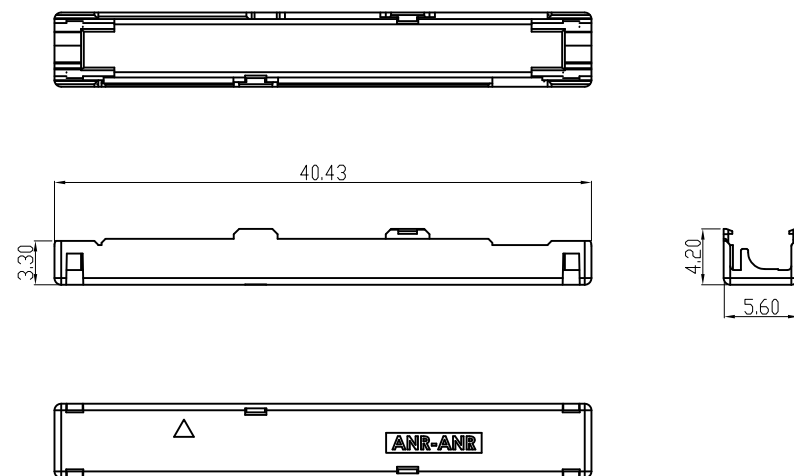


REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
A0	新訂圖面	—	02/27/2014	胡久量
A1	修改電鍍	ECR	04/09/2014	胡久量
A2	修改結構, 減小縫隙	ECR	05/07/2014	胡久量

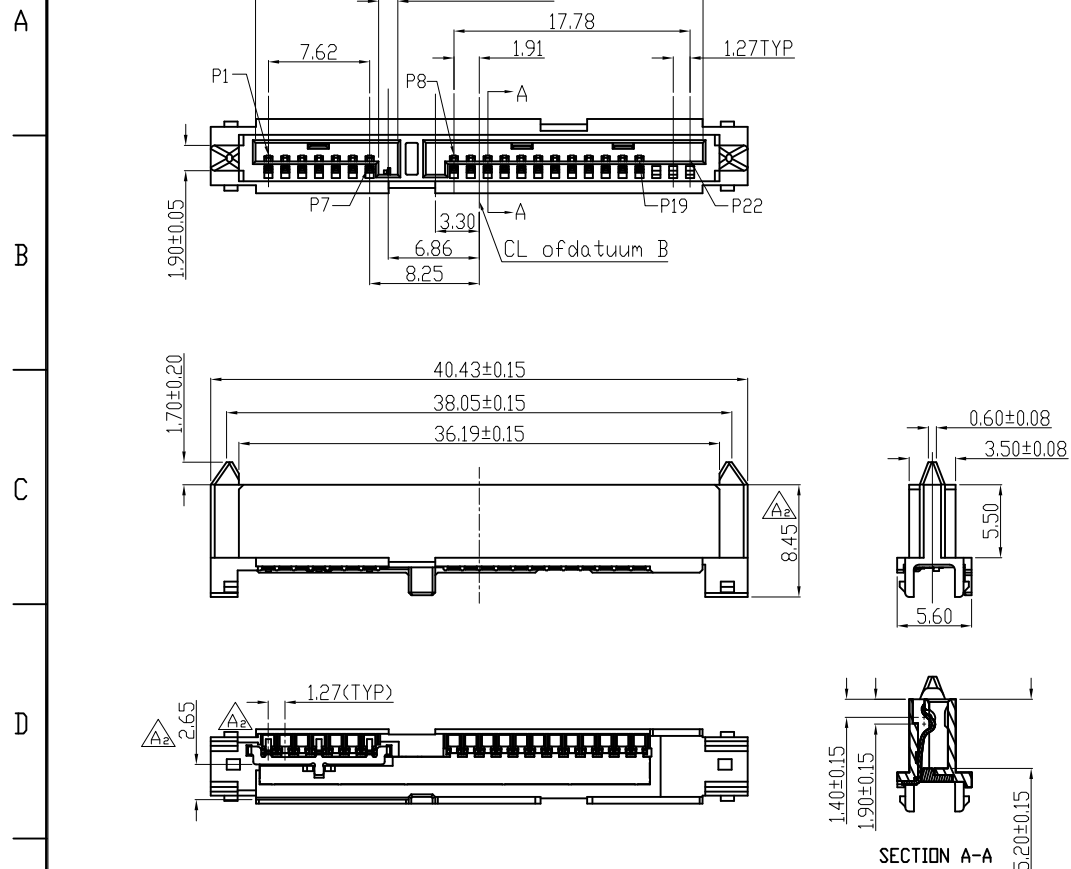

Build of material:

項次	名稱	數量	料號	材質	電鍍(或顏色)	備註
5	SATA 7+15P母頭90度(PH=1.27mm)-後蓋	1	—	temperature plastics	BLACK	成型件
4	SATA 7+15P母頭90度(PH=1.27mm)-後塞	1	—	High-temperature plastics	BLACK	成型件
3	SATA 7+15P母頭90度(PH=1.27mm)-導通片	1	—	BRASS T=0.15±0.02mm	50u" MIN NI	衝壓件
2	SATA 7+15P母頭90度(PH=1.27mm)-端子	19	—	Phosphor Bronze T=0.25±0.02mm	SEE TABLE	衝壓件
1	SATA 7+15P母頭90度(PH=1.27mm)-膠體	1	—	High-temperature plastics	BLACK	成型件

TABLE:

XX	電鍍
01	G.F/TIN PLATED前金後錫
02	3U" G/TIN PLATED前金後錫
03	5U" G/TIN PLATED前金後錫
04	10u" G/TIN PLATED前金後錫
05	15U" G/TIN PLATED前金後錫
06	30U" G/TIN PLATED前金後錫

Specification

- Electrical Characteristics:
Contact Current Rating 1.5A/pin.
INSULATION RESISTANCE:1000MΩ MIN AT 500V DC AFTER 1 MINUTE.
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC CONTACT TO CONTACT.
Contact -Resistance:30mΩ Max.
- MECHANICAC CHARACTERISTICS:
MATING FORCE:4.5kgf MAX.
UNMATING FORCES:1.0kgf MIN.
Durability:500 cycles.
- Environmental:
operating Temperature:-55°~+85°.

F	 東莞世華電子有限公司 SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN) 地址: 東莞市塘廈鎮諸佛嶺178工業區 TEL: 0769-87910020-1 FAX: 0769-87910210	DRAWN BY	胡久量	ITEM	SATA 7+15P母頭90度(PH=1.27mm)	ANGLE PROJECTION		UNIT	mm	F
		CHECKED BY								
		APPROVED BY								
				PART NO	CD4511032007-XX	TOLERANCE	.X±0.35 .XX±0.25	DATE	05/07/2014	