

RoHS
Compliant

Halogen Free

REV

DESCRIPTION

ECN/ECR

DATE

DRAWN BY

△△

新訂圖面

1/15/2020

左胜胜



△△

加标图面尺寸

3/31/2020



左胜胜

A

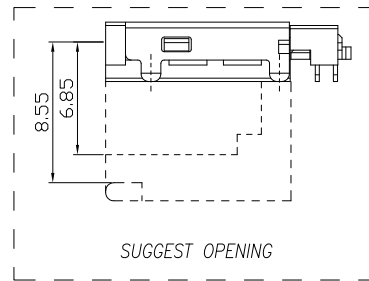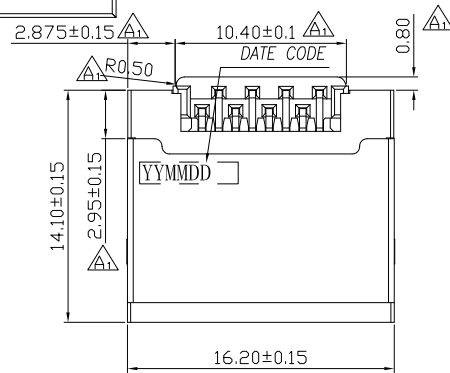



B

C

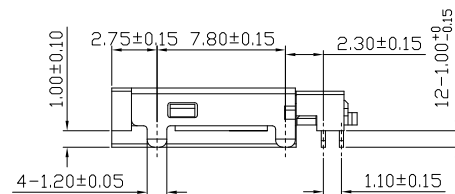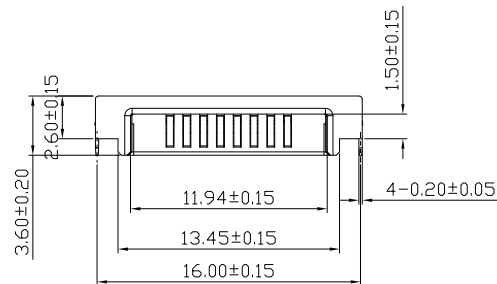

Part Number(客户)	AU
2RJ3010-038211F	G/F

D

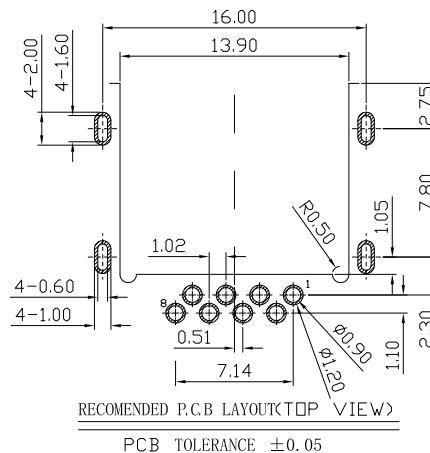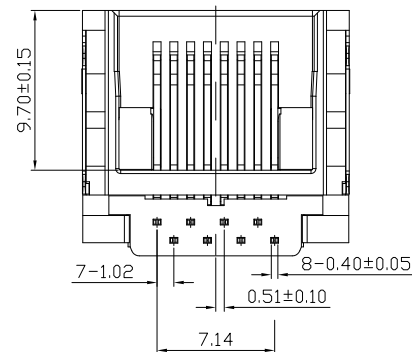

NOTES:

1. MATERIAL:

1-1: HOUSING: PA10T+35%GF (VICNYL R635NH); UL 94V-0, COLOR: BLACK

1-2: TERMINAL: PHOSPHOR BRONZE (C5210R-EH); T=0.25mm

TREATMENT:

1. GOLD 30u" MIN ON CONTACT AREA, MATTE SN 50u" MIN ON SOLDER TAIL, ALL OVER NI 50u" MIN.

1-3: SHELL: SUS (201); T=0.20mm, TREATMENT: 50u" NI

1-4: DEFEND: LCP (E130I); UL 94V-0,

COLOR: BLACK

1-5: CAP: LCP (E130I); UL 94V-0,

COLOR: BLACK

2. SPECIFICATIONS:

2-1. CURRENT RATING: 0.5AMP MAX.

2-2. VOLTAGE RATING: 150VAC MAX.

2-3. CONTACT RESISTANCE: 50mΩ MAX. (INITIAL).

100mΩ MAX. (AFTER LIFE TEST).

2-4. INSULATION RESISTANCE: 100MΩ MIN.

2-5. DURABILITY: 5000 CYCLES.

2-6. INSERTION FORCE: 2.25Kg MAX. WITH LATCH DEPRESSED.

2-7. OPERATING TEMPERATURE: -30° C TO +70° C.

2-8. FOR REFLOW SOLDERING LEAD-FREE PROCESS.

E

F



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO., LTD. (DONGGUAN)

地址: 東莞市塘廈鎮諸佛嶺178工業區

TEL: 0769-87910020-1 FAX: 0769-87910210

DRAWN BY

左胜胜

CHECKED BY

APPROVED BY


ITEM

半截式RJ45 8P8C 板上2.6mm

PART NO

CD4531082004-XX

ANGLE PROJECTION



UNIT

mm

SCALE

1:1

TOLERANCE

.X±0.20
.XX±0.10

DATE

1

2

3

4

5

6

7

8