

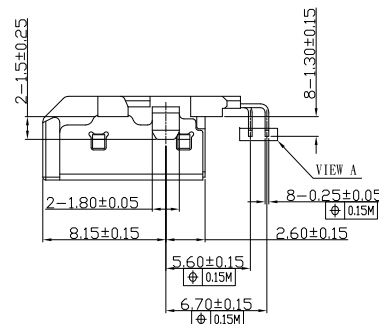
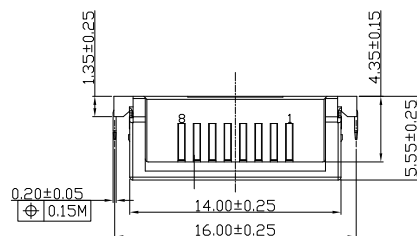





RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
	新订图面	ECR	09/28/2020	左胜胜
	外壳增加缺口防止打火花	ECR	10/21/2020	左胜胜



Part Number(客户)	AU
2RJ1818-001111F	G/F

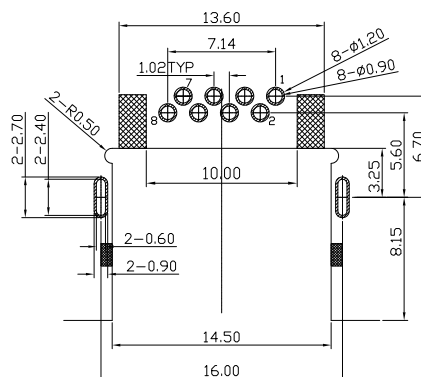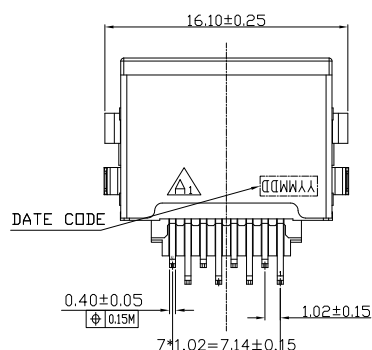

NOTES:
1.MATERIAL:
1-1:HOUSING:PA4T(TX1)/PA10T+35%GF(VICNYL R635NH);UL 94V-0, COLOR:BLACK
1-2:TERMINAL:PHOSPHOR BRONZE(C5210R-EH);T=0.25mm
TREATMENT:
1.GOLD FLASH ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
2.GOLD 30u" MIN ON CONTACT AREA,MATTE SN 50u" MIN
ON SOLDER TAIL,ALL OVER NI 50u" MIN.
1-3:SHELL:SUS(201);T=0.20mm,TREATMENT:50u" NI
1-4:CAP:LCP(E130I);UL 94V-0, COLOR:BLACK
2.SPECIFICATIONS:
2-1.VOLTAGE RATING:150VAC MAX.
2-2.CURRENT RATING:1.5AMP MAX.
2-3.INSULATION RESISTANCE:1000MΩ MIN. AT 500V DC.
2-4.DIELECTRIC WITHSTANDING VOLTAGE:
500V AC 60HZ 1MINUTE.
2-5.DURABILITY:5000 CYCLES.
2-6.OPERATING TEMPERATURE:-30°C TO+70°C.
2-7.FOR REFLOW SOLDERING LEAD-FREE PROCESS.

Page: 1/2



東莞世華電子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址:東莞市塘廈鎮諸佛嶺178工業區

TEL:0769-87910020-1 FAX:0769-87910210







DRAWN BY	左胜胜	ITEM	半截式 RJ45 PHONE JACK(板上1.35mm 二)	ANGLE PROJECTION	UNIT	mm
CHECKED BY		PART NO	CD4531092002-XX		SCALE	1:1
APPROVED BY				TOLERANCE	DATE	

X ±0.3 X ±1*
X.X ±0.2 X.X ±0.5*
X.XX ±0.1 X.XXX ±0.05

RoHS
Compliant

Halogen Free

REV	DESCRIPTION	ECN/ECR	DATE	DRAWN BY
△△	新订图面	ECR	09/28/2020	左胜胜
△△	外壳增加缺口防止打火花	ECR	10/21/2020	左胜胜

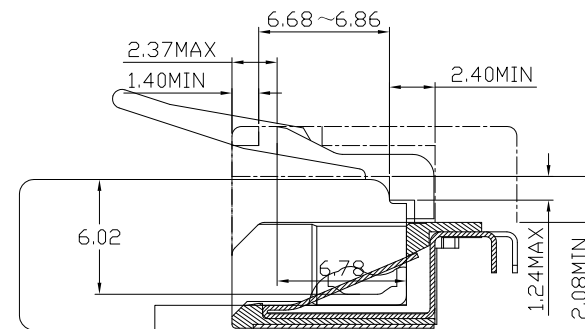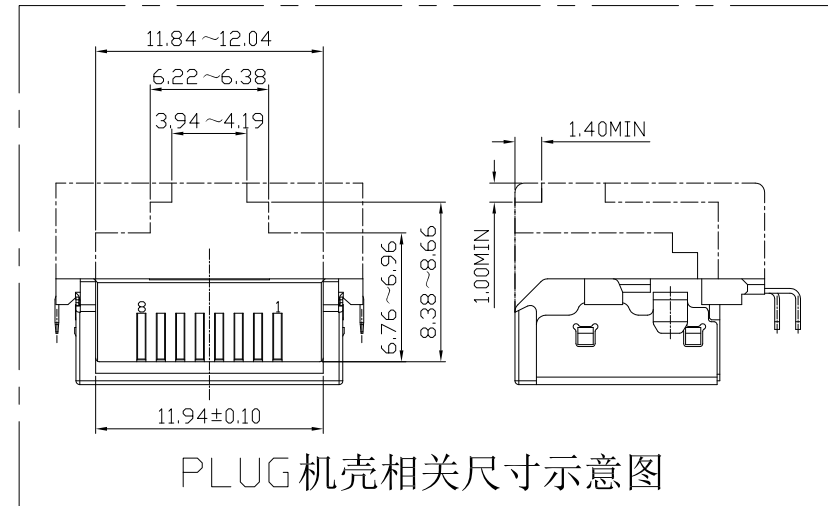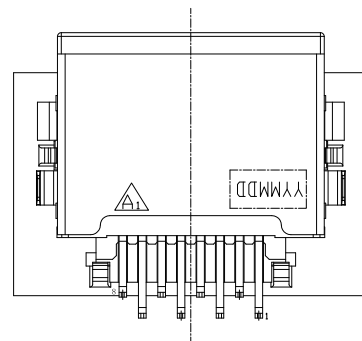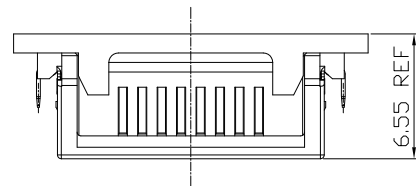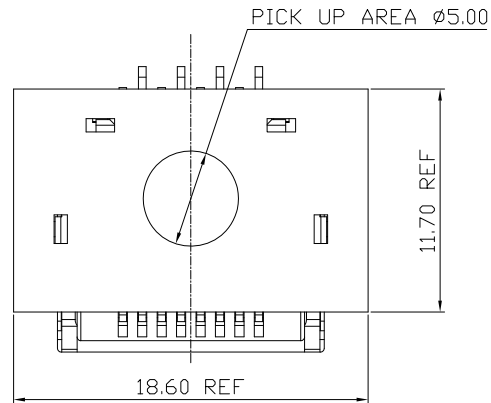

Page: 2/2



东莞世华电子有限公司

SHYH HWA ELECTRONICS CO.,LTD.(DONGGUAN)

地址: 东莞市塘厦镇诸佛岭178工业区

TEL:0769-87910020-1 FAX:0769-87910210

DRAWN BY	左胜胜	ITEM	半截式 RJ45 PHONE JACK(板上1.35mm 二)	ANGLE PROJECTION	UNIT	mm
CHECKED BY		PART NO	CD4531092002-XX		SCALE	1:1
APPROVED BY				TOLERANCE	DATE	

X ±0.3 X ±1*
X.X ±0.2 X.X ±0.5*
X.XX ±0.1 X.XXX ±0.05